

CDL32-10-1

CDL / CDLF | Vertical multistage centrifugal pump



CNP-M-000781

Scan to open this online



FLOW RANGE

16 - 40 m³/h

HEAD RANGE

4 - 14 m

MOTOR

1.5 kW

SPEED


2900 rpm

Specifications

Series	CDL / CDLF
Size	CDL32
Stages	1
Mains frequency	50 Hz
Speed	2900 rpm
Motor power	1.5 kW (2 hp)
Max pressure	29 bar
Connection	DN65
Weight	63 kg
Variant	1
Data basis	Published performance curve (Performance table, printed pp. 31–32)

Performance curve

Head versus flow - CDL32-10-1, 50 Hz

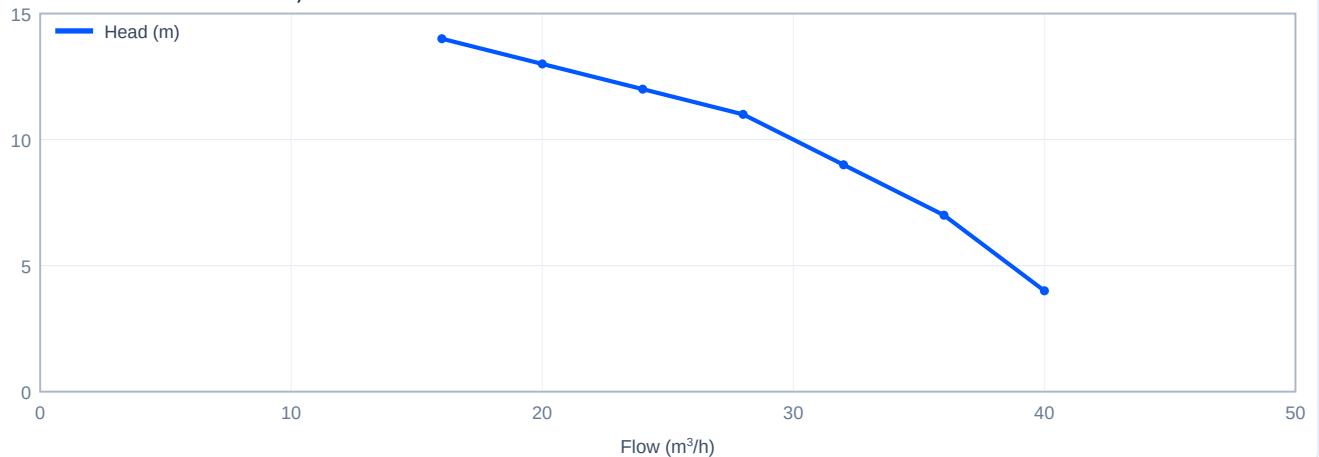

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
16	14
20	13
24	12



Flow (m³/h)	Head (m)
28	11
32	9
36	7
40	4

Dimensions (mm)

Code	Description	Value
B1	B1 — lower section height: base to motor flange	505
B2	B2 — upper section height: motor	290
B1_B2	B1+B2 — overall height	795
D1	D1 — motor diameter	190
D2	D2 — base / flange width	155
-	Net weight	63

Dimension codes follow the CNP catalogue drawing. Confirm installation dimensions with the approved drawing before civil or piping work.

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261028-A7EA0. Contact: +92 345 9547419 sales@cnppakistan.com