CNP PUMPS PAKISTAN

CDL10-12

CDL / CDLF | Vertical multistage centrifugal pump

CNP-M-000536

Scan to open this online

FLOW RANGE	HEAD RANGE	MOTOR	SPEED
6 - 15 m³/h	**107 - 175 m**	**7.5 kW**	**3500 rpm**

Specifications

Series	**CDL / CDLF**
Size	**CDL10**
Stages	**12**
Mains frequency	**60 Hz**
Speed	**3500 rpm**
Motor power	**7.5 kW (10 hp)**
Max pressure	**22 bar**
Connection	**DN40**
Weight	**100 kg**
Data basis	**Published performance curve (Performance table, printed pp. 23–24)**

Performance curve

Head versus flow - CDL10-12, 60 Hz

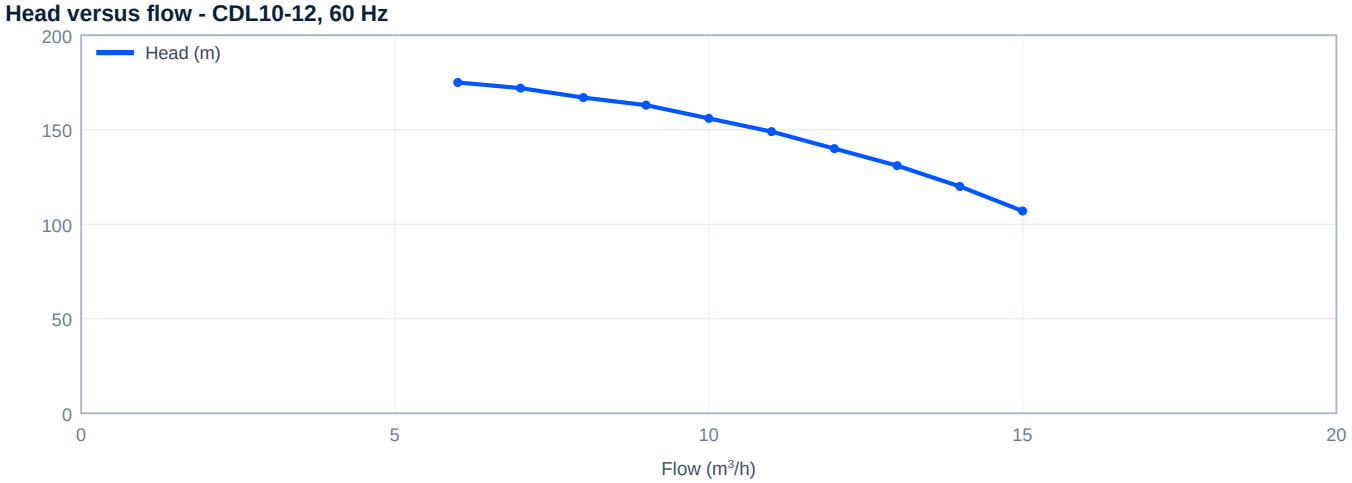

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m³/h)	Head (m)
6	175
7	172
8	167
9	163

Flow (m^3/h)	Head (m)
10	156
11	149
12	140
13	131
14	120
15	107

Dimensions (mm)

Code	Description	Value
B1	B1 — lower section height: base to motor flange	667
B2	B2 — upper section height: motor	390
B1_B2	B1+B2 — overall height	1057
D1	D1 — motor diameter	260
D2	D2 — base / flange width	208
-	Net weight	100

Dimension codes follow the CNP catalogue drawing. Confirm installation dimensions with the approved drawing before civil or piping work.

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261027-32675. Contact: +92 345 9547419 sales@cnppakistan.com