

CDL10-6

CDL / CDLF | Vertical multistage centrifugal pump



CNP-M-001373

Scan to open this online



FLOW RANGE

6 - 15 m³/h

HEAD RANGE

52 - 87 m

MOTOR

4 kW

SPEED


3500 rpm

Specifications

Series	CDL / CDLF
Size	CDL10
Stages	6
Mains frequency	60 Hz
Speed	3500 rpm
Motor power	4 kW (5.5 hp)
Max pressure	22 bar
Connection	DN40
Weight	70 kg
Data basis	Published performance curve (Performance table, printed pp. 23–24)

Performance curve

Head versus flow - CDL10-6, 60 Hz

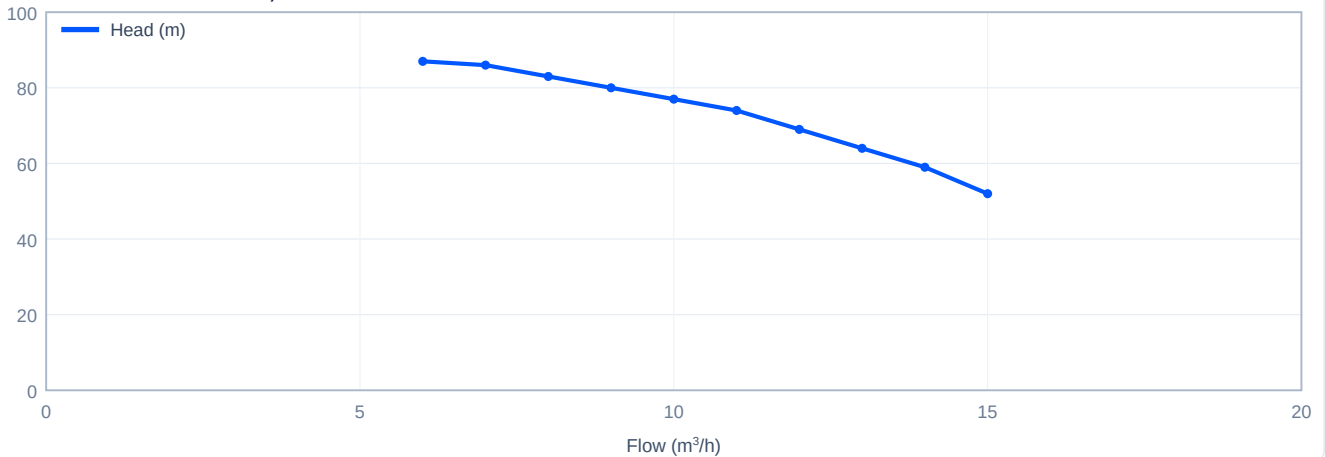

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

	Flow (m ³ /h)	Head (m)
	6	87
	7	86
	8	83
	9	80



Flow (m³/h)	Head (m)
10	77
11	74
12	69
13	64
14	59
15	52

Dimensions (mm)

Code	Description	Value
B1	B1 — lower section height: base to motor flange	477
B2	B2 — upper section height: motor	355
B1_B2	B1+B2 — overall height	832
D1	D1 — motor diameter	230
D2	D2 — base / flange width	188
-	Net weight	70

Dimension codes follow the CNP catalogue drawing. Confirm installation dimensions with the approved drawing before civil or piping work.

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261029-E4D94. Contact: +92 345 9547419 sales@cnppakistan.com