

CDL120-30

CDL / CDLF | Vertical multistage centrifugal pump



CNP-M-000665

Scan to open this online



FLOW RANGE

60 - 160 m³/h

HEAD RANGE

82.7 - 100.3 m

MOTOR

55 kW

SPEED


3540 rpm

Specifications

Series	CDL / CDLF
Size	CDL120
Stages	3
Mains frequency	60 Hz
Speed	3540 rpm
Motor power	55 kW (75 hp)
Max pressure	16 bar
Connection	DN125
Weight	545 kg
Data basis	Published performance curve (Performance table, printed pp. 39–40)

Performance curve

Head versus flow - CDL120-30, 60 Hz

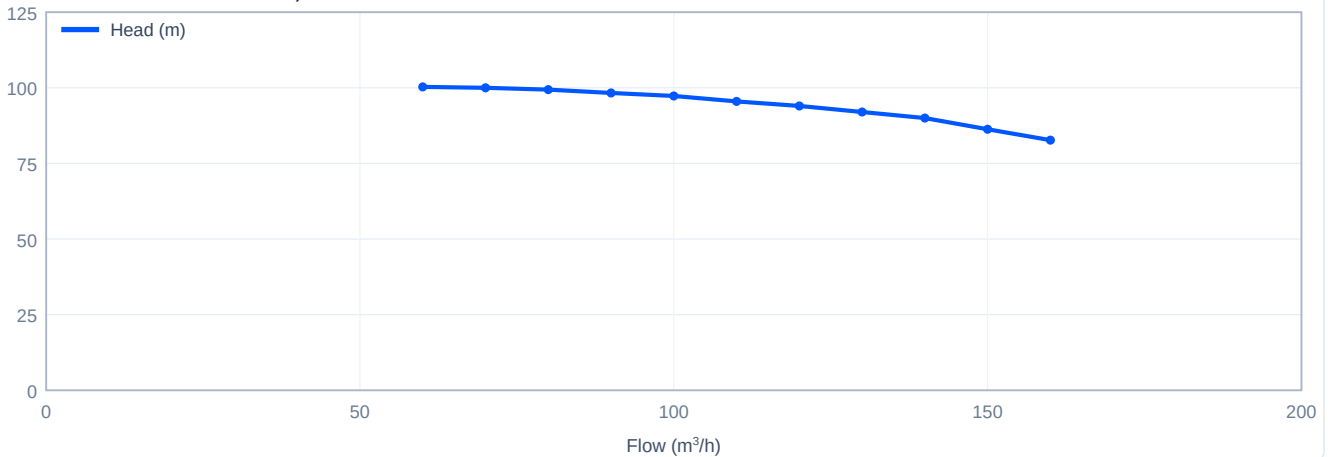

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
60	100.3
70	100
80	99.4
90	98.3



Flow (m³/h)	Head (m)
100	97.3
110	95.5
120	94
130	92
140	90
150	86.3
160	82.7

Dimensions (mm)

Code	Description	Value
B1	B1 — lower section height: base to motor flange	1190
B2	B2 — upper section height: motor	760
B1_B2	B1+B2 — overall height	1950
D1	D1 — motor diameter	510
D2	D2 — base / flange width	370
-	Net weight	545

Dimension codes follow the CNP catalogue drawing. Confirm installation dimensions with the approved drawing before civil or piping work.

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261028-B4BC1. Contact: +92 345 9547419 sales@cnppakistan.com