

CDL15-10

CDL / CDLF | Vertical multistage centrifugal pump



CNP-M-000476

Scan to open this online



FLOW RANGE

10 - 26 m³/h

HEAD RANGE

131 - 193 m

MOTOR

15 kW

SPEED


3500 rpm

Specifications

Series	CDL / CDLF
Size	CDL15
Stages	10
Mains frequency	60 Hz
Speed	3500 rpm
Motor power	15 kW (20 hp)
Max pressure	22 bar
Connection	DN50
Weight	167 kg
Data basis	Published performance curve (Performance table, printed pp. 27–28)

Performance curve

Head versus flow - CDL15-10, 60 Hz

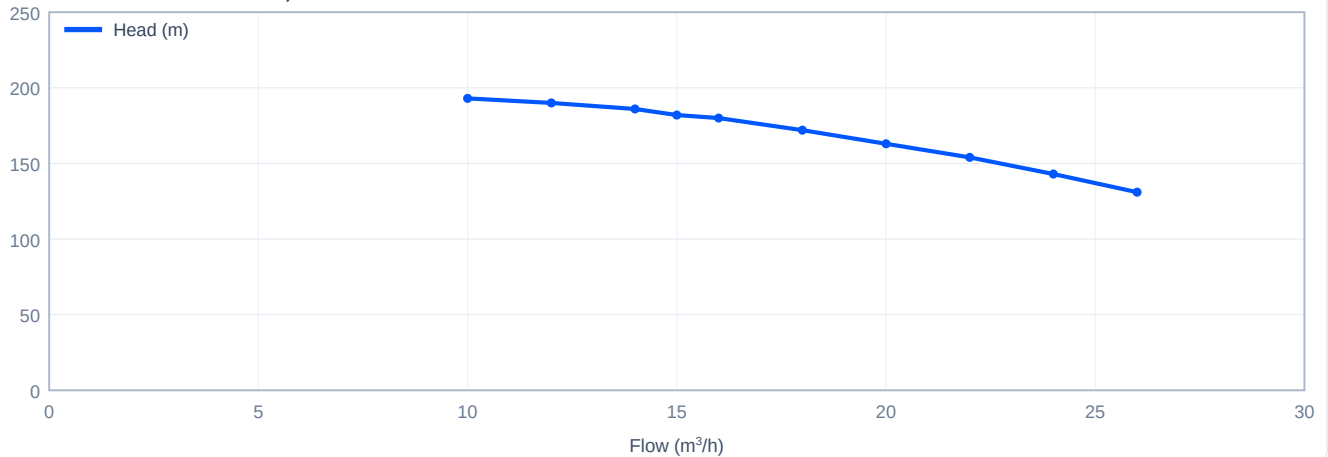

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
10	193
12	190
14	186
15	182



Flow (m³/h)	Head (m)
16	180
18	172
20	163
22	154
24	143
26	131

Dimensions (mm)

Code	Description	Value
B1	B1 — lower section height: base to motor flange	875
B2	B2 — upper section height: motor	500
B1_B2	B1+B2 — overall height	1375
D1	D1 — motor diameter	330
D2	D2 — base / flange width	255
-	Net weight	167

Dimension codes follow the CNP catalogue drawing. Confirm installation dimensions with the approved drawing before civil or piping work.

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261027-A80D2. Contact: +92 345 9547419 sales@cnppakistan.com