

CDL15-3

CDL / CDLF | Vertical multistage centrifugal pump



CNP-M-000410

Scan to open this online



FLOW RANGE

10 - 26 m³/h

HEAD RANGE

37 - 56 m

MOTOR

4 kW

SPEED


3500 rpm

Specifications

Series	CDL / CDLF
Size	CDL15
Stages	3
Mains frequency	60 Hz
Speed	3500 rpm
Motor power	4 kW (5.5 hp)
Max pressure	22 bar
Connection	DN50
Weight	58 kg
Data basis	Published performance curve (Performance table, printed pp. 27–28)

Performance curve

Head versus flow - CDL15-3, 60 Hz

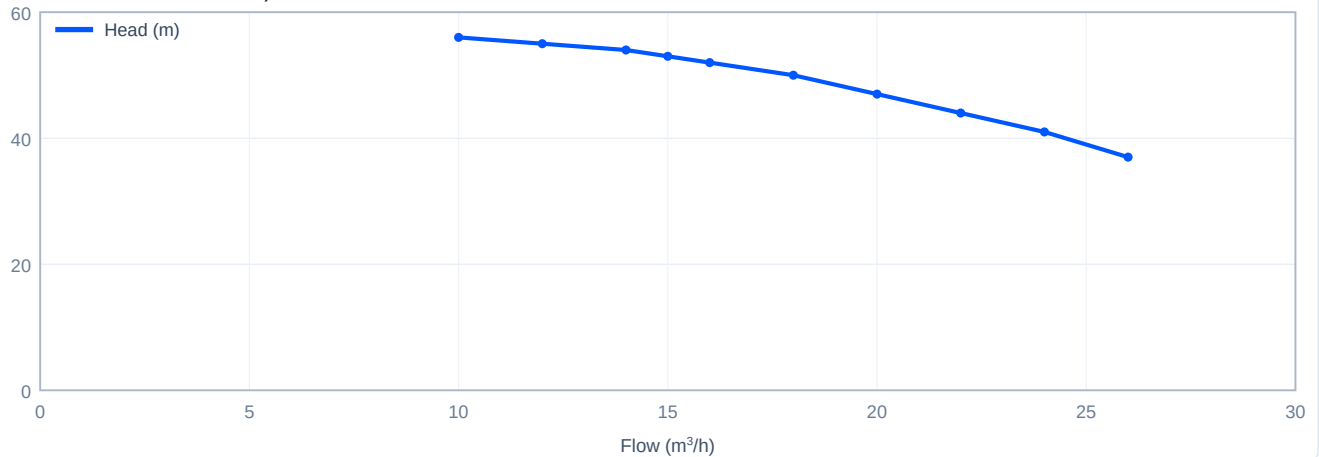

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
10	56
12	55
14	54
15	53



Flow (m³/h)	Head (m)
16	52
18	50
20	47
22	44
24	41
26	37

Dimensions (mm)

Code	Description	Value
B1	B1 — lower section height: base to motor flange	452
B2	B2 — upper section height: motor	355
B1_B2	B1+B2 — overall height	807
D1	D1 — motor diameter	230
D2	D2 — base / flange width	188
-	Net weight	58

Dimension codes follow the CNP catalogue drawing. Confirm installation dimensions with the approved drawing before civil or piping work.

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261027-8CC6B. Contact: +92 345 9547419 sales@cnppakistan.com