

CDL2-15

CDL / CDLF | Vertical multistage centrifugal pump



CNP-M-001013

Scan to open this online



FLOW RANGE

1 - 4.5 m³/h

HEAD RANGE

77 - 195 m

MOTOR

3 kW

SPEED


3500 rpm

Specifications

Series	CDL / CDLF
Size	CDL2
Stages	15
Mains frequency	60 Hz
Speed	3500 rpm
Motor power	3 kW (4 hp)
Max pressure	23 bar
Connection	DN25
Weight	45 kg
Data basis	Published performance curve (Performance table, printed pp. 15–16)

Performance curve

Head versus flow - CDL2-15, 60 Hz

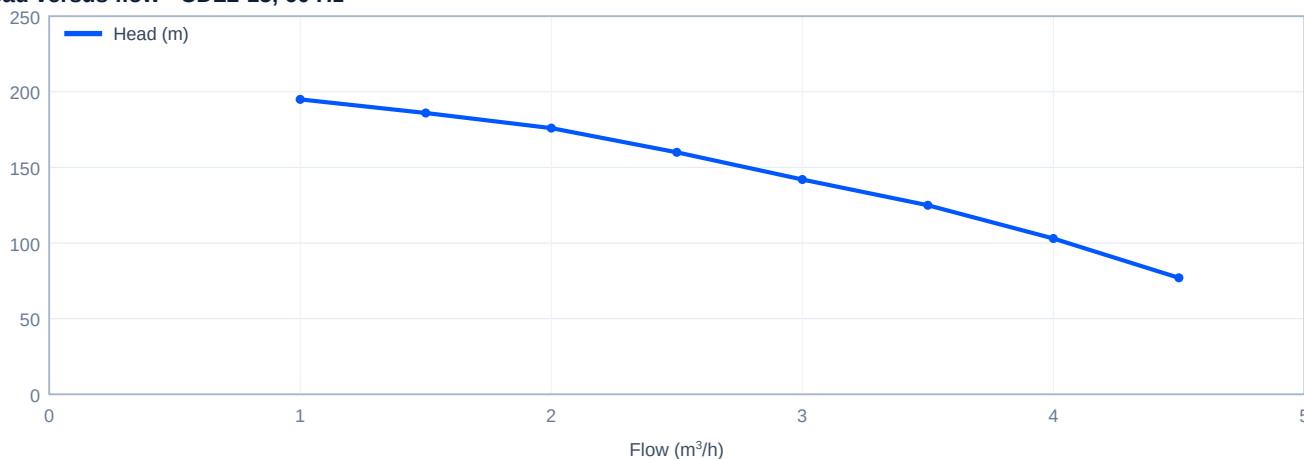

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
1	195
1.5	186
2	176
2.5	160



Flow (m³/h)	Head (m)
3	142
3.5	125
4	103
4.5	77

Dimensions (mm)

Code	Description	Value
B1	B1 — lower section height: base to motor flange	522
B2	B2 — upper section height: motor	345
B1_B2	B1+B2 — overall height	867
D1	D1 — motor diameter	197
D2	D2 — base / flange width	165
-	Net weight	45

Dimension codes follow the CNP catalogue drawing. Confirm installation dimensions with the approved drawing before civil or piping work.

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261028-79337. Contact: +92 345 9547419 sales@cnppakistan.com