

CDL200-30-A-B

CDL / CDLF | Vertical multistage centrifugal pump



CNP-M-000951

Scan to open this online



FLOW RANGE

100 - 240 m³/h

HEAD RANGE

113.5 - 139 m

MOTOR

110 kW

SPEED


3540 rpm

Specifications

Series	CDL / CDLF
Size	CDL200
Stages	3
Mains frequency	60 Hz
Speed	3540 rpm
Motor power	110 kW (150 hp)
Max pressure	16 bar
Connection	DN150
Weight	1158 kg
Variant	A-B
Data basis	Published performance curve (Performance table, printed pp. 43–44)

Performance curve

Head versus flow - CDL200-30-A-B, 60 Hz

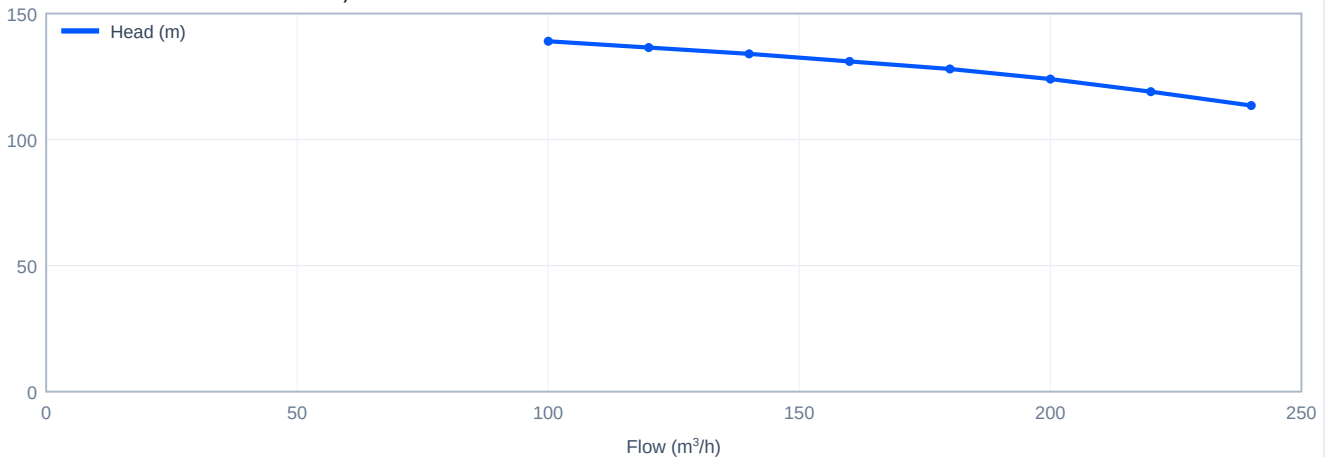

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
100	139
120	136.5
140	134



Flow (m³/h)	Head (m)
160	131
180	128
200	124
220	119
240	113.5

Dimensions (mm)

Code	Description	Value
B1	B1 — lower section height: base to motor flange	1325
B2	B2 — upper section height: motor	1140
B1_B2	B1+B2 — overall height	2465
D1	D1 — motor diameter	645
D2	D2 — base / flange width	550
-	Net weight	1158

Dimension codes follow the CNP catalogue drawing. Confirm installation dimensions with the approved drawing before civil or piping work.

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261028-CD303. Contact: +92 345 9547419 sales@cnppakistan.com