

CDL32-40-2

CDL / CDLF | Vertical multistage centrifugal pump



CNP-M-000483

Scan to open this online



FLOW RANGE

20 - 48 m³/h

HEAD RANGE

45 - 94 m

MOTOR

11 kW

SPEED


3500 rpm

Specifications

Series	CDL / CDLF
Size	CDL32
Stages	4
Mains frequency	60 Hz
Speed	3500 rpm
Motor power	11 kW (15 hp)
Max pressure	29 bar
Connection	DN65
Weight	176 kg
Variant	2
Data basis	Published performance curve (Performance table, printed pp. 31–32)

Performance curve

Head versus flow - CDL32-40-2, 60 Hz

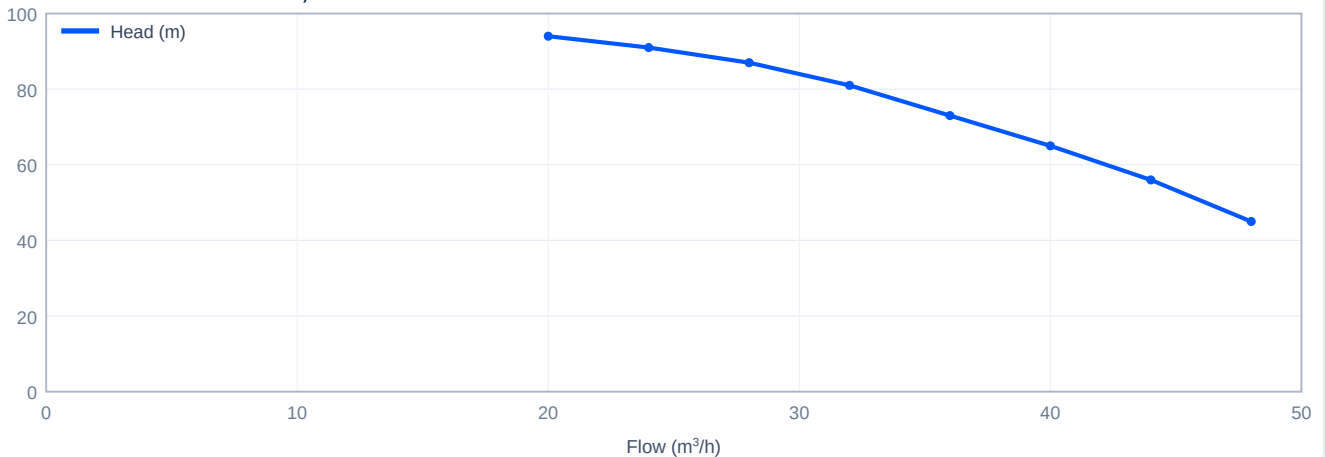

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
20	94
24	91
28	87



Flow (m³/h)	Head (m)
32	81
36	73
40	65
44	56
48	45

Dimensions (mm)

Code	Description	Value
B1	B1 — lower section height: base to motor flange	820
B2	B2 — upper section height: motor	500
B1_B2	B1+B2 — overall height	1320
D1	D1 — motor diameter	330
D2	D2 — base / flange width	255
-	Net weight	176

Dimension codes follow the CNP catalogue drawing. Confirm installation dimensions with the approved drawing before civil or piping work.

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261027-0492C. Contact: +92 345 9547419 sales@cnppakistan.com