

CDL65-20-2

CDL / CDLF | Vertical multistage centrifugal pump



CNP-M-000946

Scan to open this online



FLOW RANGE

40 - 100 m³/h

HEAD RANGE

23 - 53 m

MOTOR

15 kW

SPEED


3500 rpm

Specifications

Series	CDL / CDLF
Size	CDL65
Stages	2
Mains frequency	60 Hz
Speed	3500 rpm
Motor power	15 kW (20 hp)
Max pressure	22 bar
Connection	DN100
Weight	187 kg
Variant	2
Data basis	Published performance curve (Performance table, printed pp. 35–36)

Performance curve

Head versus flow - CDL65-20-2, 60 Hz

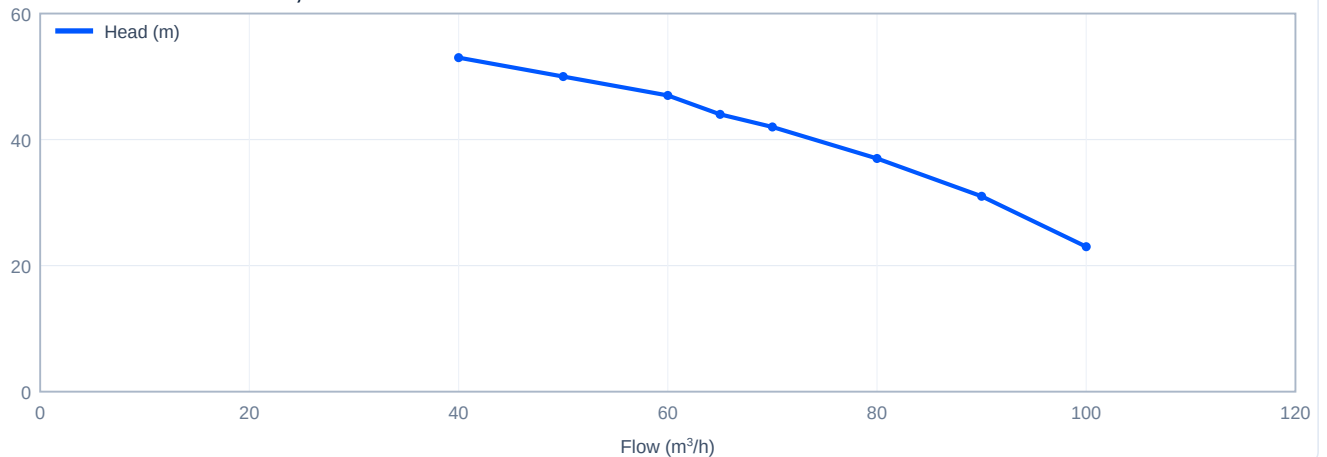

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
40	53
50	50
60	47



Flow (m³/h)	Head (m)
65	44
70	42
80	37
90	31
100	23

Dimensions (mm)

Code	Description	Value
B1	B1 — lower section height: base to motor flange	754
B2	B2 — upper section height: motor	500
B1_B2	B1+B2 — overall height	1254
D1	D1 — motor diameter	330
D2	D2 — base / flange width	255
-	Net weight	187

Dimension codes follow the CNP catalogue drawing. Confirm installation dimensions with the approved drawing before civil or piping work.

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261028-55AA2. Contact: +92 345 9547419 sales@cnppakistan.com