

CDLK1-330/33

CDLK / CDLKF (immersion) | Vertical multistage centrifugal pump



CNP-M-001404

Scan to open this online



FLOW RANGE

0.4 - 2 m³/h

HEAD RANGE

118 - 196 m

MOTOR

2.2 kW

SPEED


2900 rpm

Specifications

Series	CDLK / CDLKF (immersion)
Size	CDLK1
Stages	33
Mains frequency	50 Hz
Speed	2900 rpm
Motor power	2.2 kW (3 hp)
Max pressure	21 bar
Connection	Thread G1 1/4"
Weight	34 kg
Data basis	Published performance curve (Performance table, printed pp. 13–14)

Performance curve

Head versus flow - CDLK1-330/33, 50 Hz

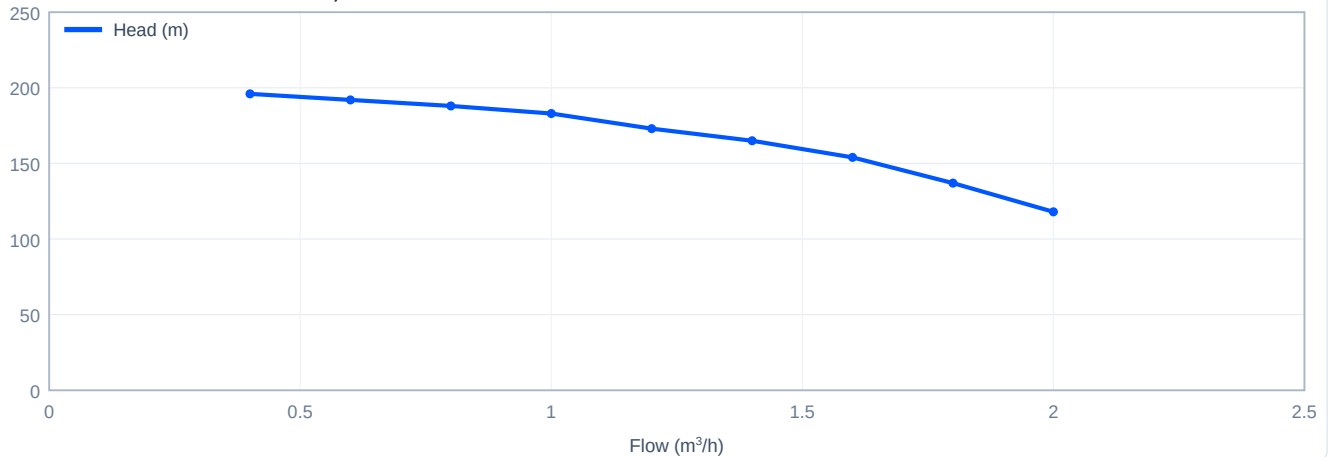

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
0.4	196
0.6	192
0.8	188
1	183



Flow (m³/h)	Head (m)
1.2	173
1.4	165
1.6	154
1.8	137
2	118

Dimensions (mm)

Code	Description	Value
A	A — overall height	1094
B	B — immersion length	681
C	C — motor height	413
D	D	155
D1	D1 — motor diameter	190
-	Net weight	34

Dimension codes follow the CNP catalogue drawing. Confirm installation dimensions with the approved drawing before civil or piping work.

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261029-01654. Contact: +92 345 9547419 sales@cnppakistan.com