

CDLK15-50/5

CDLK / CDLKF (immersion) | Vertical multistage centrifugal pump



CNP-M-000633

Scan to open this online



FLOW RANGE

8 - 22 m³/h

HEAD RANGE

42 - 65 m

MOTOR

4 kW

SPEED


2900 rpm

Specifications

Series	CDLK / CDLKF (immersion)
Size	CDLK15
Stages	5
Mains frequency	50 Hz
Speed	2900 rpm
Motor power	4 kW
Max pressure	22 bar
Connection	Thread G2"
Weight	67 kg
Data basis	Published performance curve (Performance table, printed pp. 23–24)

Performance curve

Head versus flow - CDLK15-50/5, 50 Hz

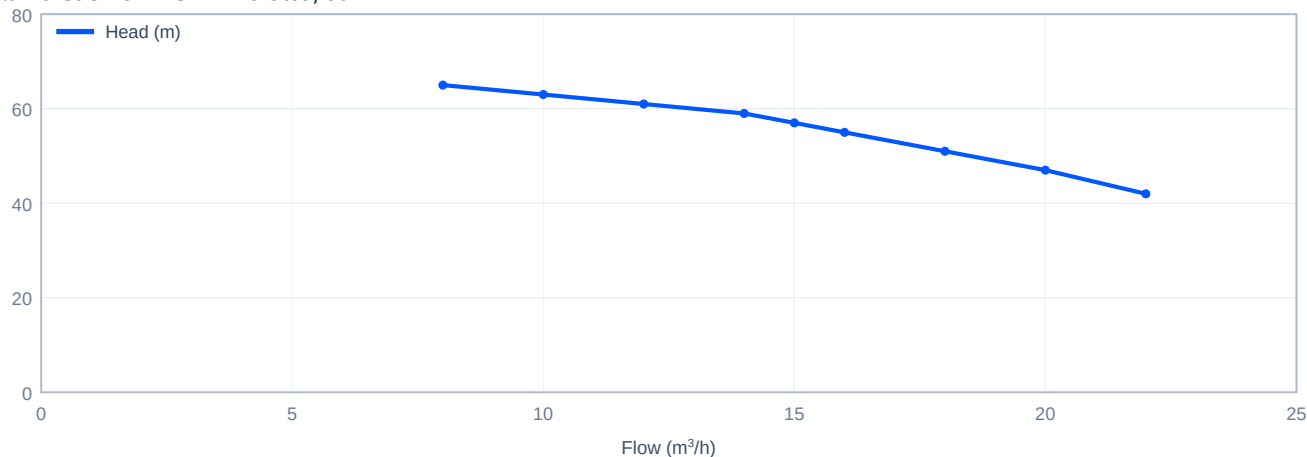

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
8	65
10	63
12	61
14	59



Flow (m³/h)	Head (m)
15	57
16	55
18	51
20	47
22	42

Dimensions (mm)

Code	Description	Value
A	A — overall height	800
B	B — immersion length	306
C	C — motor height	494
D	D	185
D1	D1 — motor diameter	230
-	Net weight	67

Dimension codes follow the CNP catalogue drawing. Confirm installation dimensions with the approved drawing before civil or piping work.

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261028-5746D. Contact: +92 345 9547419 sales@cnppakistan.com