CNP PUMPS PAKISTAN

CDLK2-30/3

CDLK / CDLKF (immersion) | Vertical multistage centrifugal pump

CNP-M-001767

Scan to open this online

FLOW RANGE	HEAD RANGE	MOTOR	SPEED
1 - 3.5 m^3/h	12 - 27 m	0.37 kW	2900 rpm

Specifications

Series	**CDLK / CDLKF (immersion)**
Size	**CDLK2**
Stages	**3**
Mains frequency	**50 Hz**
Speed	**2900 rpm**
Motor power	**0.37 kW (0.5 hp)**
Max pressure	**23 bar**
Connection	**Thread G1 1/4"**
Weight	**15 kg**
Data basis	**Published performance curve (Performance table, printed pp. 15–16)**

Performance curve

Head versus flow - CDLK2-30/3, 50 Hz

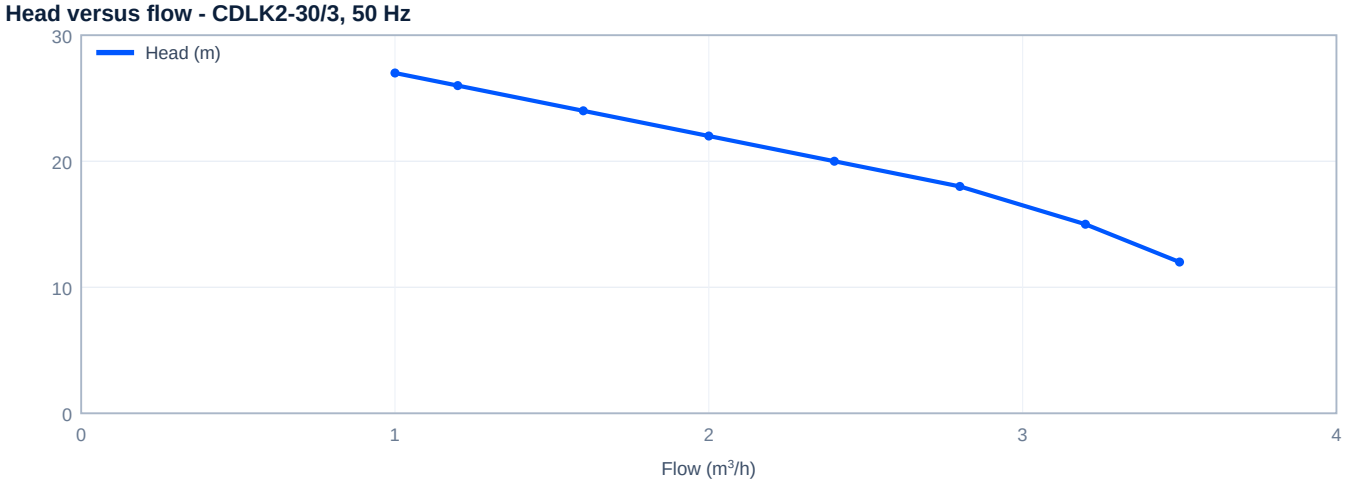

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m^3/h)	Head (m)
1	27
1.2	26
1.6	24
2	22

Flow (m^3/h)	Head (m)
2.4	20
2.8	18
3.2	15
3.5	12

Dimensions (mm)

Code	Description	Value
A	A — overall height	471
B	B — immersion length	141
C	C — motor height	330
D	D	117
D1	D1 — motor diameter	148
-	Net weight	15

Dimension codes follow the CNP catalogue drawing. Confirm installation dimensions with the approved drawing before civil or piping work.

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261029-6A361. Contact: +92 345 9547419 sales@cnppakistan.com