

CDLK20-100/10

CDLK / CDLKF (immersion) | Vertical multistage centrifugal pump



CNP-M-001121

Scan to open this online



FLOW RANGE

10 - 28 m³/h

HEAD RANGE

85 - 136 m

MOTOR

11 kW

SPEED


2900 rpm

Specifications

Series	CDLK / CDLKF (immersion)
Size	CDLK20
Stages	10
Mains frequency	50 Hz
Speed	2900 rpm
Motor power	11 kW (15 hp)
Max pressure	23 bar
Connection	Thread G2"
Weight	135 kg
Data basis	Published performance curve (Performance table, printed pp. 25–26)

Performance curve

Head versus flow - CDLK20-100/10, 50 Hz

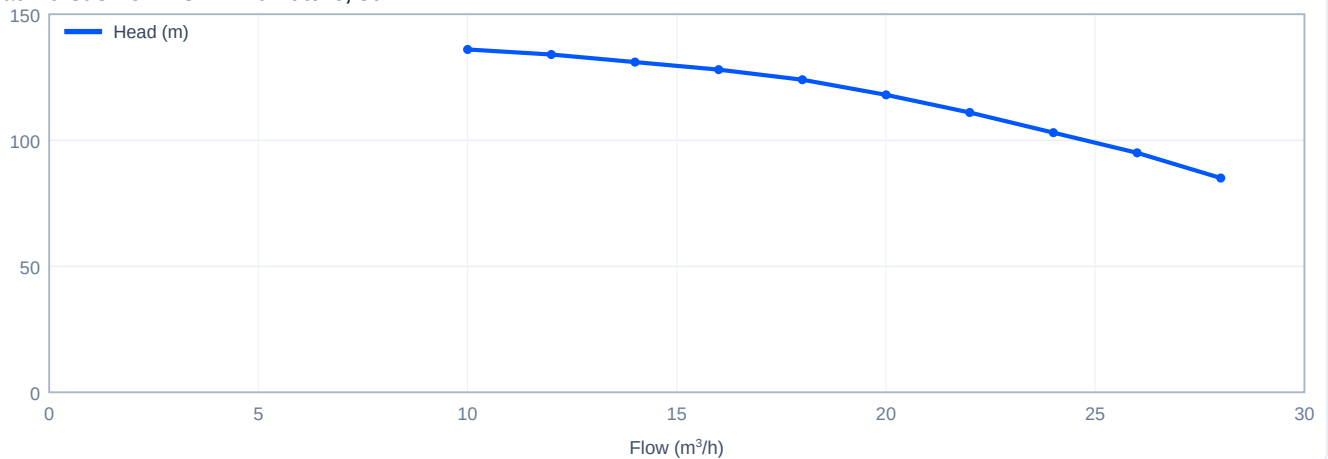

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
10	136
12	134
14	131
16	128



Flow (m³/h)	Head (m)
18	124
20	118
22	111
24	103
26	95
28	85

Dimensions (mm)

Code	Description	Value
A	A — overall height	1231
B	B — immersion length	531
C	C — motor height	700
D	D	255
D1	D1 — motor diameter	330
-	Net weight	135

Dimension codes follow the CNP catalogue drawing. Confirm installation dimensions with the approved drawing before civil or piping work.

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261028-332CA. Contact: +92 345 9547419 sales@cnppakistan.com