

CDLK20-140/14

CDLK / CDLKF (immersion) | Vertical multistage centrifugal pump



CNP-M-001862

Scan to open this online



FLOW RANGE

10 - 28 m³/h

HEAD RANGE

119 - 192 m

MOTOR

15 kW

SPEED


2900 rpm

Specifications

Series	CDLK / CDLKF (immersion)
Size	CDLK20
Stages	14
Mains frequency	50 Hz
Speed	2900 rpm
Motor power	15 kW (20 hp)
Max pressure	23 bar
Connection	Thread G2"
Weight	155 kg
Data basis	Published performance curve (Performance table, printed pp. 25–26)

Performance curve

Head versus flow - CDLK20-140/14, 50 Hz

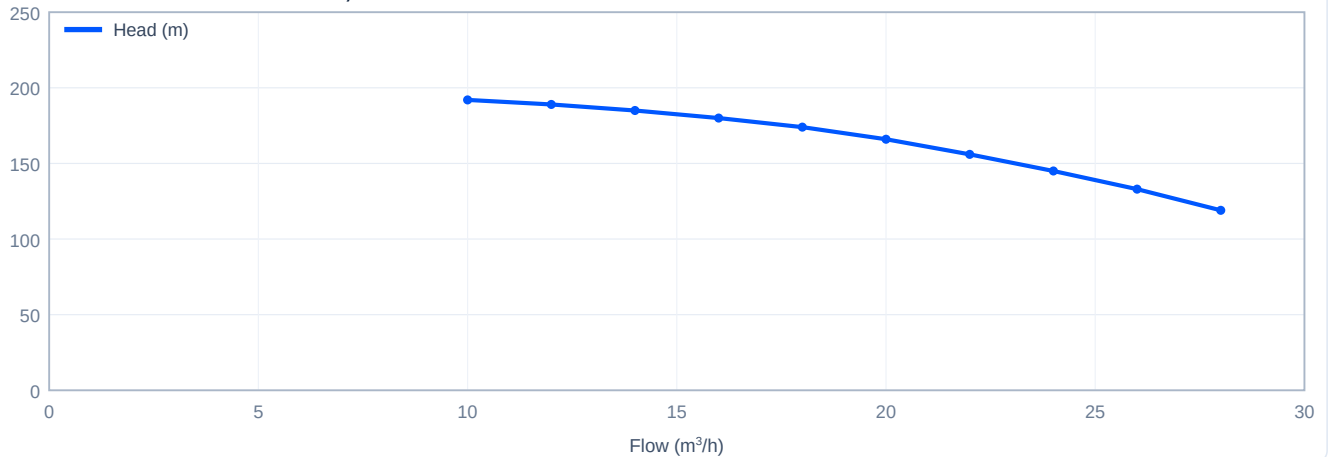

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
10	192
12	189
14	185
16	180



Flow (m³/h)	Head (m)
18	174
20	166
22	156
24	145
26	133
28	119

Dimensions (mm)

Code	Description	Value
A	A — overall height	1411
B	B — immersion length	711
C	C — motor height	700
D	D	255
D1	D1 — motor diameter	330
-	Net weight	155

Dimension codes follow the CNP catalogue drawing. Confirm installation dimensions with the approved drawing before civil or piping work.

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261029-33152. Contact: +92 345 9547419 sales@cnppakistan.com