

CDLK20-30/3

CDLK / CDLKF (immersion) | Vertical multistage centrifugal pump



CNP-M-001720

Scan to open this online



FLOW RANGE

10 - 28 m³/h

HEAD RANGE

24 - 40 m

MOTOR

4 kW

SPEED


2900 rpm

Specifications

Series	CDLK / CDLKF (immersion)
Size	CDLK20
Stages	3
Mains frequency	50 Hz
Speed	2900 rpm
Motor power	4 kW (5.5 hp)
Max pressure	23 bar
Connection	Thread G2"
Weight	50 kg
Data basis	Published performance curve (Performance table, printed pp. 25–26)

Performance curve

Head versus flow - CDLK20-30/3, 50 Hz

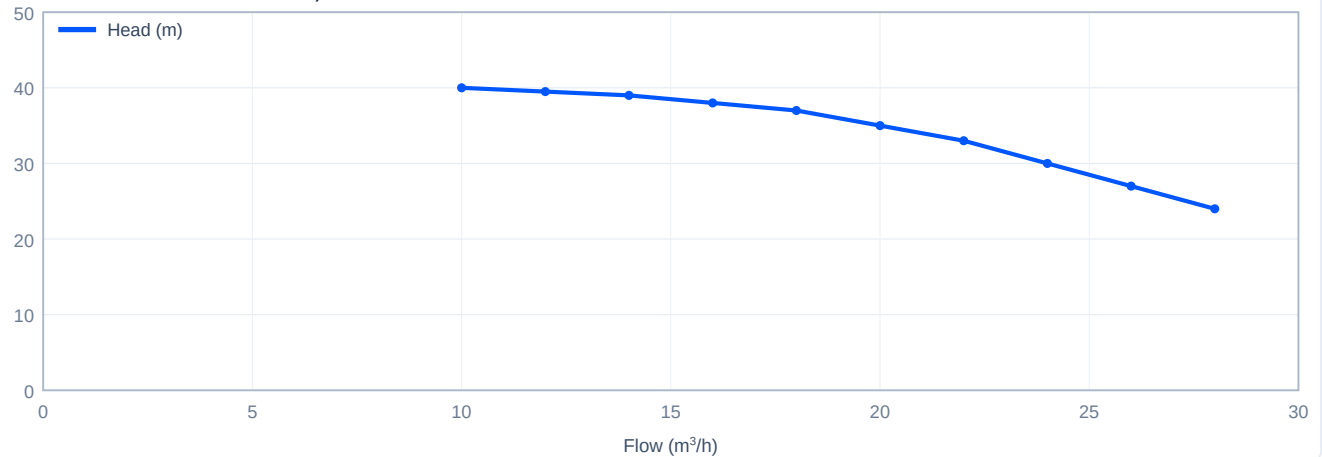

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
10	40
12	39.5
14	39
16	38



Flow (m³/h)	Head (m)
18	37
20	35
22	33
24	30
26	27
28	24

Dimensions (mm)

Code	Description	Value
A	A — overall height	710
B	B — immersion length	216
C	C — motor height	494
D	D	185
D1	D1 — motor diameter	230
-	Net weight	50

Dimension codes follow the CNP catalogue drawing. Confirm installation dimensions with the approved drawing before civil or piping work.

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261029-E4711. Contact: +92 345 9547419 sales@cnppakistan.com