

CDLK20-50/5

CDLK / CDLKF (immersion) | Vertical multistage centrifugal pump



CNP-M-001761

Scan to open this online



FLOW RANGE

10 - 28 m³/h

HEAD RANGE

40 - 67 m

MOTOR

5.5 kW

SPEED


2900 rpm

Specifications

Series	CDLK / CDLKF (immersion)
Size	CDLK20
Stages	5
Mains frequency	50 Hz
Speed	2900 rpm
Motor power	5.5 kW (7.5 hp)
Max pressure	23 bar
Connection	Thread G2"
Weight	67 kg
Data basis	Published performance curve (Performance table, printed pp. 25–26)

Performance curve

Head versus flow - CDLK20-50/5, 50 Hz

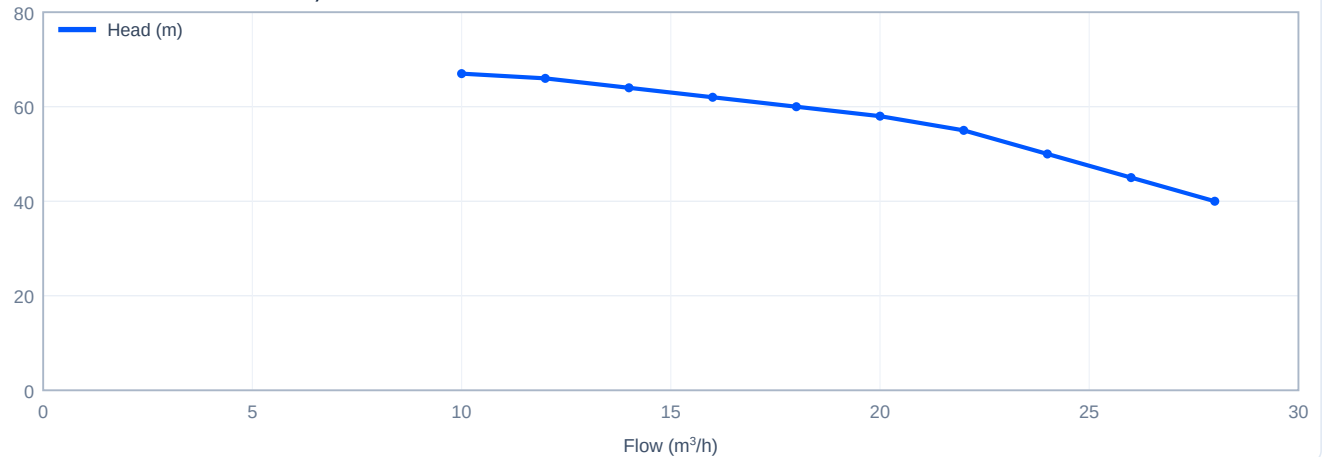

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
10	67
12	66
14	64
16	62



Flow (m³/h)	Head (m)
18	60
20	58
22	55
24	50
26	45
28	40

Dimensions (mm)

Code	Description	Value
A	A — overall height	855
B	B — immersion length	306
C	C — motor height	549
D	D	210
D1	D1 — motor diameter	260
-	Net weight	67

Dimension codes follow the CNP catalogue drawing. Confirm installation dimensions with the approved drawing before civil or piping work.

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261029-0434B. Contact: +92 345 9547419 sales@cnppakistan.com