

CDLK3-60/6

CDLK / CDLKF (immersion) | Vertical multistage centrifugal pump



CNP-M-001049

Scan to open this online



FLOW RANGE

1.2 - 4 m³/h

HEAD RANGE

19 - 36 m

MOTOR

0.55 kW

SPEED


2900 rpm

Specifications

Series	CDLK / CDLKF (immersion)
Size	CDLK3
Stages	6
Mains frequency	50 Hz
Speed	2900 rpm
Motor power	0.55 kW (0.75 hp)
Max pressure	22 bar
Connection	Thread G1 1/4"
Weight	18 kg
Data basis	Published performance curve (Performance table, printed pp. 17–18)

Performance curve

Head versus flow - CDLK3-60/6, 50 Hz

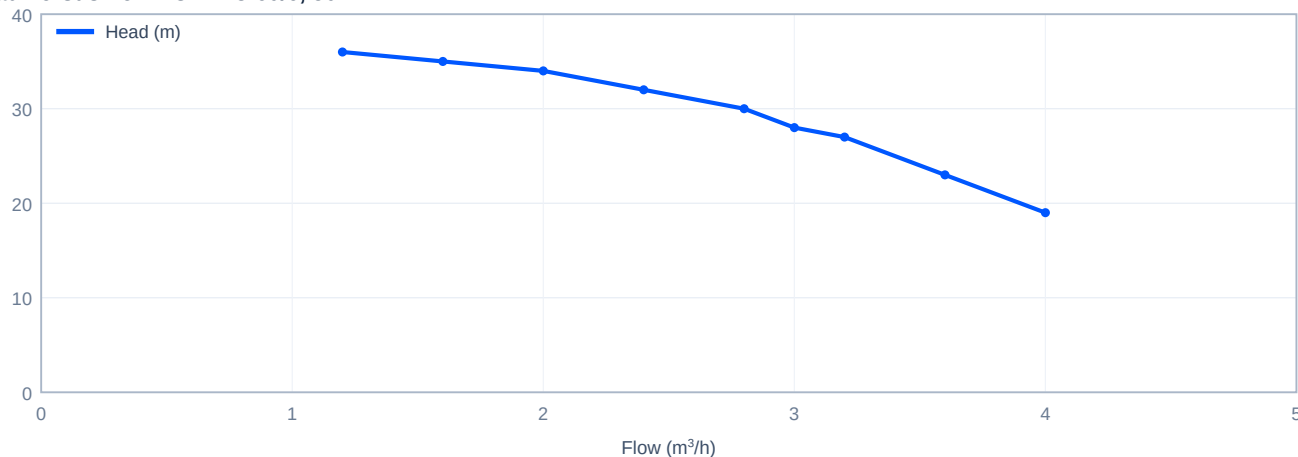

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
1.2	36
1.6	35
2.0	34
2.4	32



Flow (m³/h)	Head (m)
2.8	30
3	28
3.2	27
3.6	23
4	19

Dimensions (mm)

Code	Description	Value
A	A — overall height	525
B	B — immersion length	195
C	C — motor height	330
D	D	117
D1	D1 — motor diameter	148
-	Net weight	18

Dimension codes follow the CNP catalogue drawing. Confirm installation dimensions with the approved drawing before civil or piping work.

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261028-BFF55. Contact: +92 345 9547419 sales@cnppakistan.com