

CDLK3-70/7

CDLK / CDLKF (immersion) | Vertical multistage centrifugal pump



CNP-M-001029

Scan to open this online



FLOW RANGE

1.2 - 4 m³/h

HEAD RANGE

22 - 43 m

MOTOR

0.55 kW

SPEED


2900 rpm

Specifications

Series	CDLK / CDLKF (immersion)
Size	CDLK3
Stages	7
Mains frequency	50 Hz
Speed	2900 rpm
Motor power	0.55 kW (0.75 hp)
Max pressure	22 bar
Connection	Thread G1 1/4"
Weight	18 kg
Data basis	Published performance curve (Performance table, printed pp. 17–18)

Performance curve

Head versus flow - CDLK3-70/7, 50 Hz

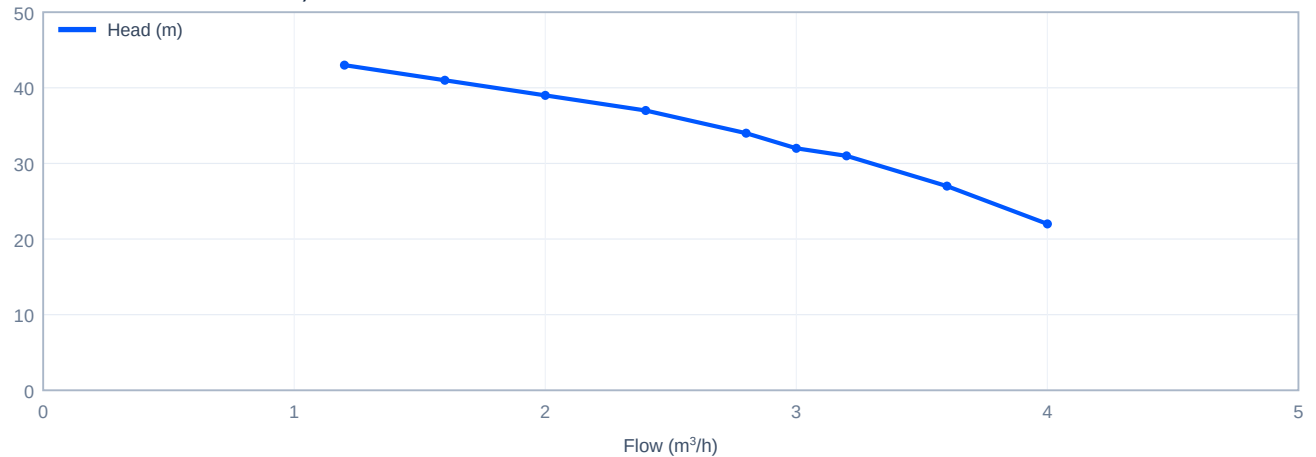

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
1.2	43
1.6	41
2	39
2.4	37



Flow (m³/h)	Head (m)
2.8	34
3	32
3.2	31
3.6	27
4	22

Dimensions (mm)

Code	Description	Value
A	A — overall height	543
B	B — immersion length	213
C	C — motor height	330
D	D	117
D1	D1 — motor diameter	148
-	Net weight	18

Dimension codes follow the CNP catalogue drawing. Confirm installation dimensions with the approved drawing before civil or piping work.

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261028-E40C9. Contact: +92 345 9547419 sales@cnppakistan.com