

CDLK32-140/14

CDLK / CDLKF (immersion) | Vertical multistage centrifugal pump



CNP-M-001253

Scan to open this online



FLOW RANGE

16 - 40 m³/h

HEAD RANGE

142 - 255 m

MOTOR

30 kW

SPEED


2900 rpm

Specifications

Series	CDLK / CDLKF (immersion)
Size	CDLK32
Stages	14
Mains frequency	50 Hz
Speed	2900 rpm
Motor power	30 kW (40 hp)
Max pressure	26 bar
Connection	DIN flange DN65
Weight	297 kg
Data basis	Published performance curve (Performance table, printed pp. 27–28)

Performance curve

Head versus flow - CDLK32-140/14, 50 Hz

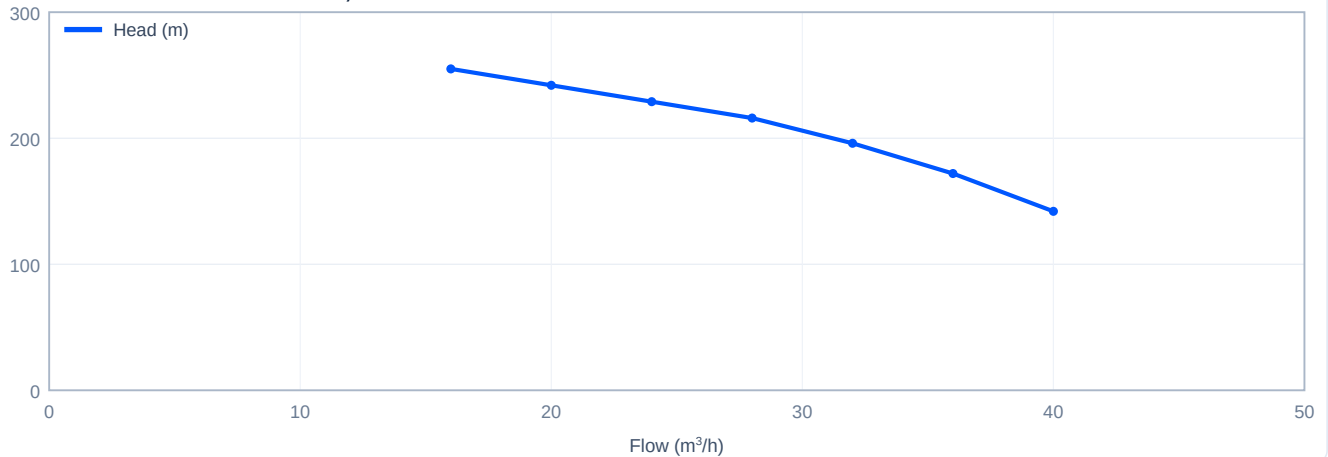

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
16	255
20	242
24	229
28	216



Flow (m³/h)	Head (m)
32	196
36	172
40	142

Dimensions (mm)

Code	Description	Value
A	A — overall height	1971
B	B — immersion length	1103
C	C — motor height	868
D	D	310
D1	D1 — motor diameter	400
-	Net weight	297

Dimension codes follow the CNP catalogue drawing. Confirm installation dimensions with the approved drawing before civil or piping work.

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261029-8E10F. Contact: +92 345 9547419 sales@cnppakistan.com