CNP PUMPS PAKISTAN

CDLK32-70/7-2

CDLK / CDLKF (immersion) | Vertical multistage centrifugal pump

CNP-M-001815


Scan to open this online

FLOW RANGE	HEAD RANGE	MOTOR	SPEED
16 - 40 m³/h	60 - 119 m	15 kW	2900 rpm

Specifications

Series	**CDLK / CDLKF (immersion)**
Size	**CDLK32**
Stages	**7**
Mains frequency	**50 Hz**
Speed	**2900 rpm**
Motor power	**15 kW (20 hp)**
Max pressure	**26 bar**
Connection	**DIN flange DN65**
Weight	**165 kg**
Variant	**2**
Data basis	**Published performance curve (Performance table, printed pp. 27–28)**

Performance curve

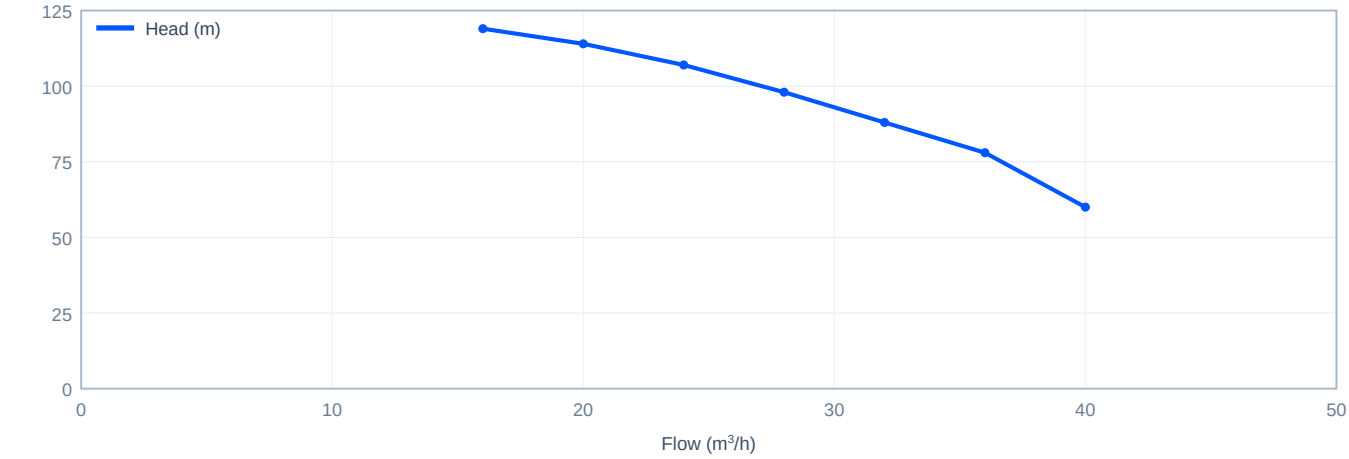

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m³/h)	Head (m)
16	119
20	114
24	107

Flow (m^3/h)	Head (m)
28	98
32	88
36	78
40	60

Dimensions (mm)

Code	Description	Value
A	A — overall height	1331
B	B — immersion length	613
C	C — motor height	718
D	D	255
D1	D1 — motor diameter	330
-	Net weight	165

Dimension codes follow the CNP catalogue drawing. Confirm installation dimensions with the approved drawing before civil or piping work.

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261029-2866A. Contact: +92 345 9547419 sales@cnppakistan.com