

CDLK4-160/16

CDLK / CDLKF (immersion) | Vertical multistage centrifugal pump



CNP-M-001854

Scan to open this online



FLOW RANGE

1.5 - 7 m³/h

HEAD RANGE

78 - 152 m

MOTOR

3 kW

SPEED


2900 rpm

Specifications

Series	CDLK / CDLKF (immersion)
Size	CDLK4
Stages	16
Mains frequency	50 Hz
Speed	2900 rpm
Motor power	3 kW (4 hp)
Max pressure	21 bar
Connection	Thread G1 1/4"
Weight	40 kg
Data basis	Published performance curve (Performance table, printed pp. 19–20)

Performance curve

Head versus flow - CDLK4-160/16, 50 Hz

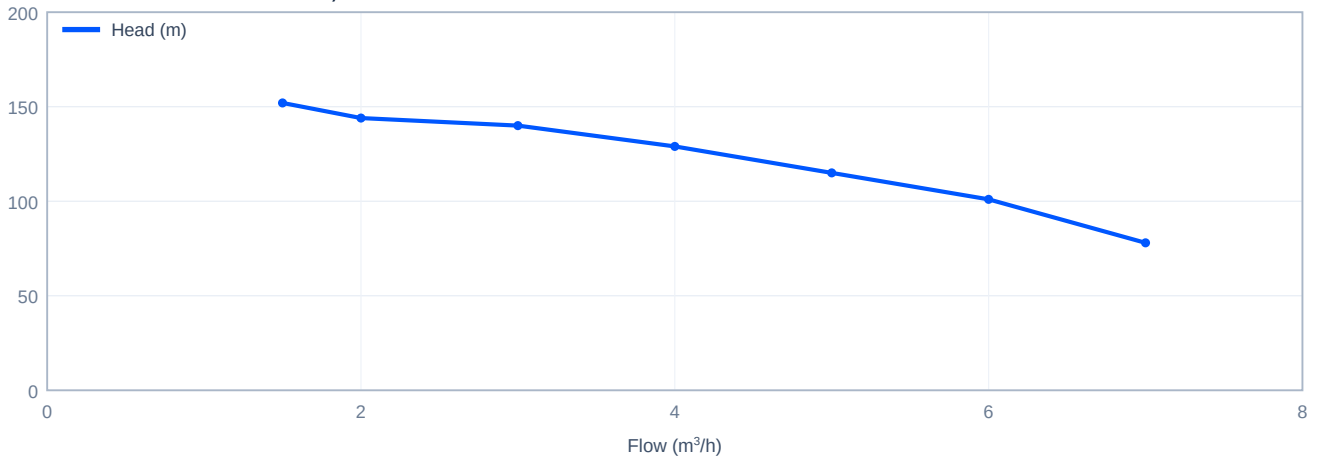

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m³/h)	Head (m)
1.5	152
2	144
3	140
4	129



Flow (m³/h)	Head (m)
5	115
6	101
7	78

Dimensions (mm)

Code	Description	Value
A	A — overall height	1006
B	B — immersion length	528
C	C — motor height	478
D	D	165
D1	D1 — motor diameter	197
-	Net weight	40

Dimension codes follow the CNP catalogue drawing. Confirm installation dimensions with the approved drawing before civil or piping work.

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261029-19E02. Contact: +92 345 9547419 sales@cnppakistan.com