

CDLK4-60/6

CDLK / CDLKF (immersion) | Vertical multistage centrifugal pump



CNP-M-001000

Scan to open this online



FLOW RANGE

1.5 - 7 m³/h

HEAD RANGE

28 - 56 m

MOTOR

1.1 kW

SPEED


2900 rpm

Specifications

Series	CDLK / CDLKF (immersion)
Size	CDLK4
Stages	6
Mains frequency	50 Hz
Speed	2900 rpm
Motor power	1.1 kW (1.5 hp)
Max pressure	21 bar
Connection	Thread G1 1/4"
Weight	23 kg
Data basis	Published performance curve (Performance table, printed pp. 19–20)

Performance curve

Head versus flow - CDLK4-60/6, 50 Hz

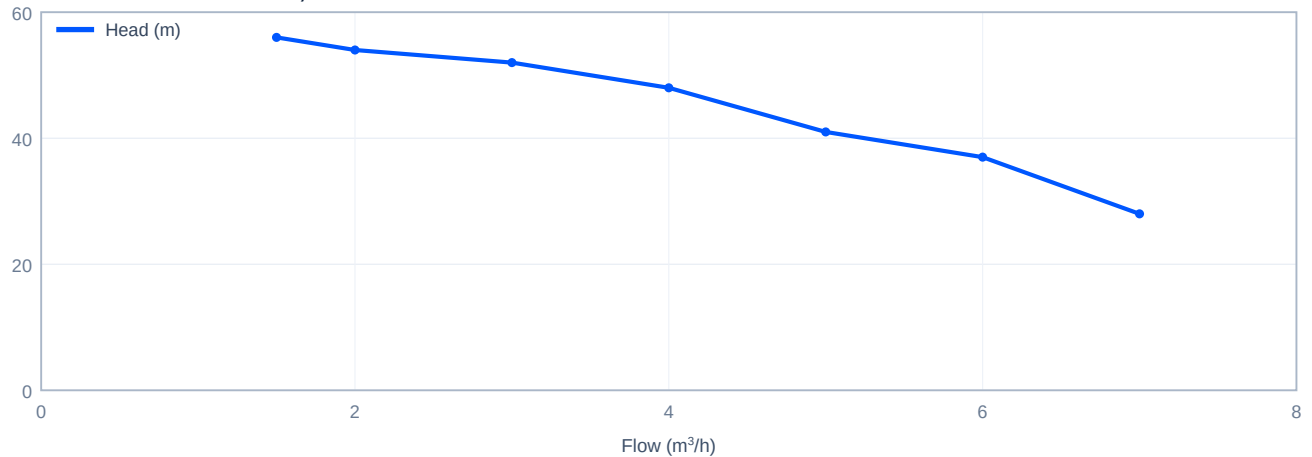

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
1.5	56
2	54
3	52
4	48



Flow (m³/h)	Head (m)
5	41
6	37
7	28

Dimensions (mm)

Code	Description	Value
A	A — overall height	616
B	B — immersion length	258
C	C — motor height	358
D	D	142
D1	D1 — motor diameter	170
-	Net weight	23

Dimension codes follow the CNP catalogue drawing. Confirm installation dimensions with the approved drawing before civil or piping work.

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261028-2E3D1. Contact: +92 345 9547419 sales@cnppakistan.com