

CDLK15-20/2

CDLK / CDLKF (immersion) | Vertical multistage centrifugal pump



CNP-M-000632

Scan to open this online



FLOW RANGE

10 - 26 m³/h

HEAD RANGE

24 - 36.5 m

MOTOR

3 kW

SPEED


3500 rpm

Specifications

Series	CDLK / CDLKF (immersion)
Size	CDLK15
Stages	2
Mains frequency	60 Hz
Speed	3500 rpm
Motor power	3 kW (4 hp)
Max pressure	22 bar
Connection	Thread G2"
Weight	43 kg
Data basis	Published performance curve (Performance table, printed pp. 41–42)

Performance curve

Head versus flow - CDLK15-20/2, 60 Hz

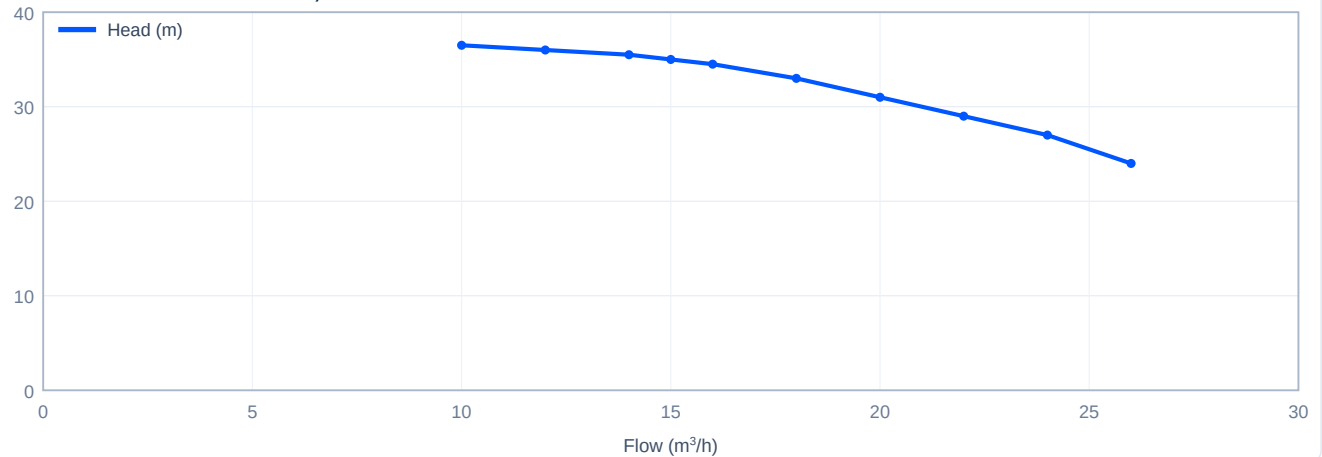

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
10	36.5
12	36
14	35.5
15	35



Flow (m³/h)	Head (m)
16	34.5
18	33
20	31
22	29
24	27
26	24

Dimensions (mm)

Code	Description	Value
A	A — overall height	655
B	B — immersion length	171
C	C — motor height	484
D	D	165
D1	D1 — motor diameter	197
-	Net weight	43

Dimension codes follow the CNP catalogue drawing. Confirm installation dimensions with the approved drawing before civil or piping work.

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261028-7055F. Contact: +92 345 9547419 sales@cnppakistan.com