

CDLK2-30/3

CDLK / CDLKF (immersion) | Vertical multistage centrifugal pump



CNP-M-000943

Scan to open this online



FLOW RANGE

1 - 4.5 m³/h

HEAD RANGE

15 - 39 m

MOTOR

0.75 kW

SPEED


3500 rpm

Specifications

Series	CDLK / CDLKF (immersion)
Size	CDLK2
Stages	3
Mains frequency	60 Hz
Speed	3500 rpm
Motor power	0.75 kW (1 hp)
Max pressure	23 bar
Connection	Thread G1 1/4"
Weight	18 kg
Data basis	Published performance curve (Performance table, printed pp. 33–34)

Performance curve

Head versus flow - CDLK2-30/3, 60 Hz

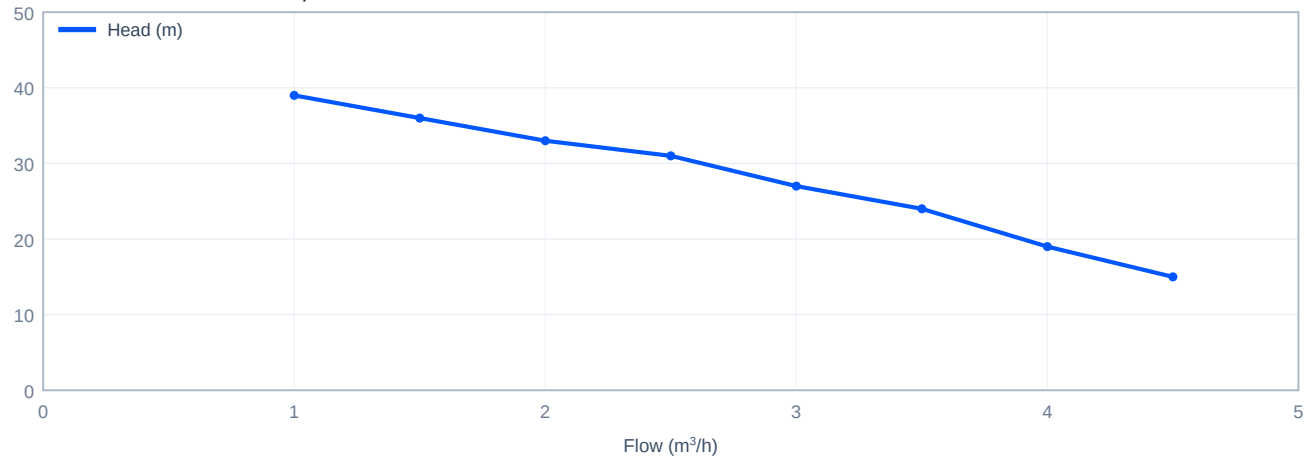

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
1	39
1.5	36
2	33
2.5	31



Flow (m³/h)	Head (m)
3	27
3.5	24
4	19
4.5	15

Dimensions (mm)

Code	Description	Value
A	A — overall height	499
B	B — immersion length	141
C	C — motor height	358
D	D	142
D1	D1 — motor diameter	170
-	Net weight	18

Dimension codes follow the CNP catalogue drawing. Confirm installation dimensions with the approved drawing before civil or piping work.

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261028-F65C2. Contact: +92 345 9547419 sales@cnppakistan.com