

CDLK2-60/6

CDLK / CDLKF (immersion) | Vertical multistage centrifugal pump



CNP-M-001453

Scan to open this online



FLOW RANGE

1 - 4.5 m³/h

HEAD RANGE

30 - 78 m

MOTOR

1.1 kW

SPEED


3500 rpm

Specifications

Series	CDLK / CDLKF (immersion)
Size	CDLK2
Stages	6
Mains frequency	60 Hz
Speed	3500 rpm
Motor power	1.1 kW (1.5 hp)
Max pressure	23 bar
Connection	Thread G1 1/4"
Weight	22 kg
Data basis	Published performance curve (Performance table, printed pp. 33–34)

Performance curve

Head versus flow - CDLK2-60/6, 60 Hz

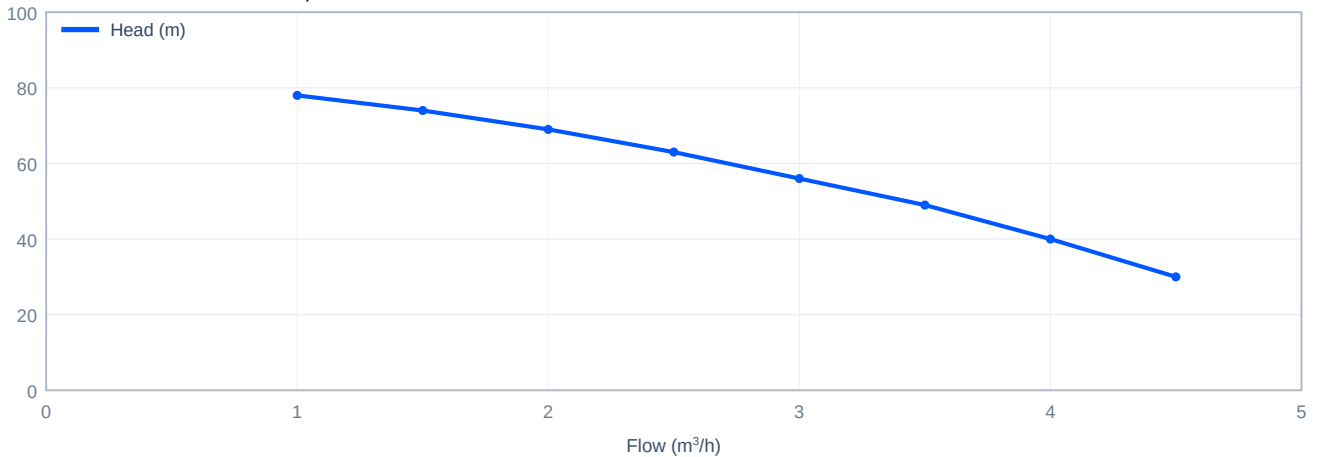

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
1	78
1.5	74
2	69
2.5	63



Flow (m³/h)	Head (m)
3	56
3.5	49
4	40
4.5	30

Dimensions (mm)

Code	Description	Value
A	A — overall height	553
B	B — immersion length	195
C	C — motor height	358
D	D	142
D1	D1 — motor diameter	170
-	Net weight	22

Dimension codes follow the CNP catalogue drawing. Confirm installation dimensions with the approved drawing before civil or piping work.

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261029-C57F3. Contact: +92 345 9547419 sales@cnppakistan.com