

CDLK20-20/2

CDLK / CDLKF (immersion) | Vertical multistage centrifugal pump



CNP-M-001056

Scan to open this online



FLOW RANGE

12 - 34 m³/h

HEAD RANGE

21 - 38 m

MOTOR

4 kW

SPEED


3500 rpm

Specifications

Series	CDLK / CDLKF (immersion)
Size	CDLK20
Stages	2
Mains frequency	60 Hz
Speed	3500 rpm
Motor power	4 kW (5.5 hp)
Max pressure	23 bar
Connection	Thread G2"
Weight	50 kg
Data basis	Published performance curve (Performance table, printed pp. 43–44)

Performance curve

Head versus flow - CDLK20-20/2, 60 Hz

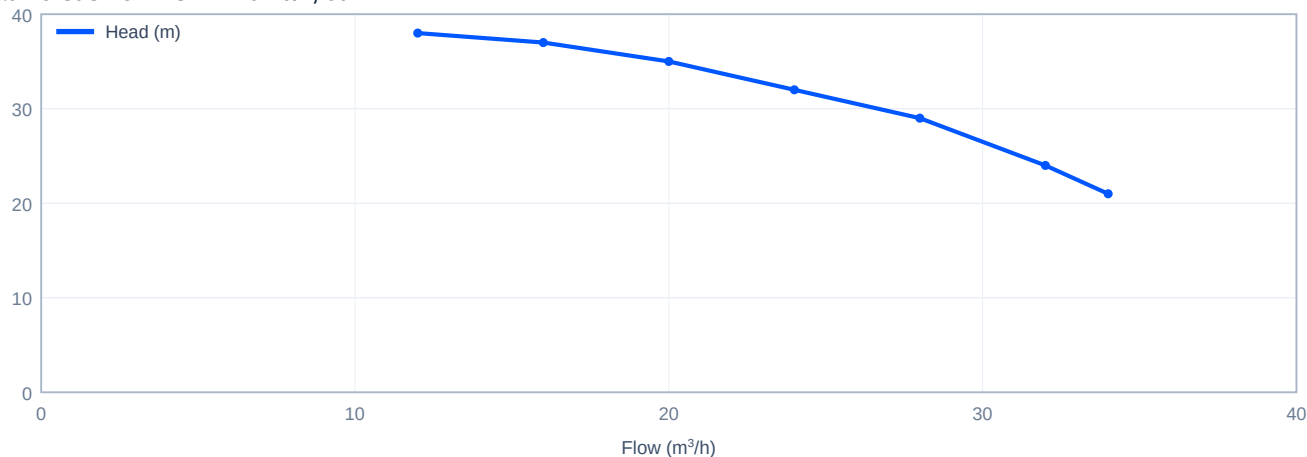

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
12	38
16	37
20	35
24	32



Flow (m³/h)	Head (m)
28	29
32	24
34	21

Dimensions (mm)

Code	Description	Value
A	A — overall height	665
B	B — immersion length	171
C	C — motor height	494
D	D	185
D1	D1 — motor diameter	230
-	Net weight	50

Dimension codes follow the CNP catalogue drawing. Confirm installation dimensions with the approved drawing before civil or piping work.

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261028-AE3BE. Contact: +92 345 9547419 sales@cnppakistan.com