

CDLK3-20/2

CDLK / CDLKF (immersion) | Vertical multistage centrifugal pump



CNP-M-000919

Scan to open this online



FLOW RANGE

1.5 - 5 m³/h

HEAD RANGE

8 - 17.5 m

MOTOR

0.37 kW

SPEED


3500 rpm

Specifications

Series	CDLK / CDLKF (immersion)
Size	CDLK3
Stages	2
Mains frequency	60 Hz
Speed	3500 rpm
Motor power	0.37 kW (0.5 hp)
Max pressure	22 bar
Connection	Thread G1 1/4"
Weight	15 kg
Data basis	Published performance curve (Performance table, printed pp. 35–36)

Performance curve

Head versus flow - CDLK3-20/2, 60 Hz

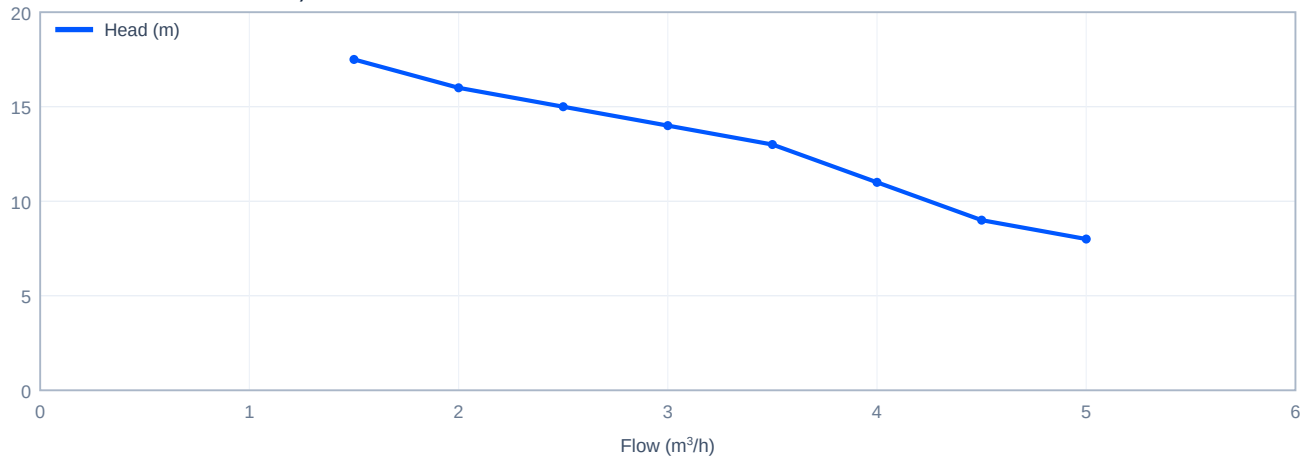

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
1.5	17.5
2	16
2.5	15
3	14



Flow (m³/h)	Head (m)
3.5	13
4	11
4.5	9
5	8

Dimensions (mm)

Code	Description	Value
A	A — overall height	453
B	B — immersion length	123
C	C — motor height	330
D	D	117
D1	D1 — motor diameter	148
-	Net weight	15

Dimension codes follow the CNP catalogue drawing. Confirm installation dimensions with the approved drawing before civil or piping work.

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261028-C5373. Contact: +92 345 9547419 sales@cnppakistan.com