

CDLK32-20/2

CDLK / CDLKF (immersion) | Vertical multistage centrifugal pump



CNP-M-001832

Scan to open this online



FLOW RANGE

20 - 48 m³/h

HEAD RANGE

27 - 52 m

MOTOR

7.5 kW

SPEED


3500 rpm

Specifications

Series	CDLK / CDLKF (immersion)
Size	CDLK32
Stages	2
Mains frequency	60 Hz
Speed	3500 rpm
Motor power	7.5 kW (10 hp)
Max pressure	26 bar
Connection	DIN flange DN65
Weight	95 kg
Data basis	Published performance curve (Performance table, printed pp. 45–46)

Performance curve

Head versus flow - CDLK32-20/2, 60 Hz

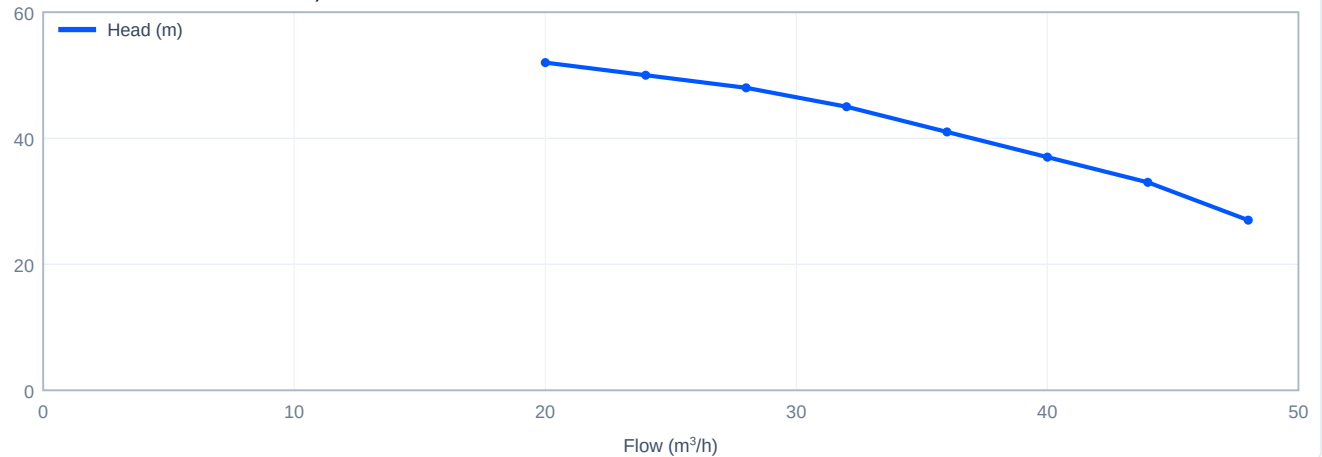

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
20	52
24	50
28	48
32	45



Flow (m³/h)	Head (m)
36	41
40	37
44	33
48	27

Dimensions (mm)

Code	Description	Value
A	A — overall height	818
B	B — immersion length	263
C	C — motor height	555
D	D	210
D1	D1 — motor diameter	260
-	Net weight	95

Dimension codes follow the CNP catalogue drawing. Confirm installation dimensions with the approved drawing before civil or piping work.

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261029-18BED. Contact: +92 345 9547419 sales@cnppakistan.com