

CDLK32-20/2-2

CDLK / CDLKF (immersion) | Vertical multistage centrifugal pump



CNP-M-001579

Scan to open this online



FLOW RANGE

20 - 48 m³/h

HEAD RANGE

17 - 41 m

MOTOR

5.5 kW

SPEED


3500 rpm

Specifications

Series	CDLK / CDLKF (immersion)
Size	CDLK32
Stages	2
Mains frequency	60 Hz
Speed	3500 rpm
Motor power	5.5 kW (7.5 hp)
Max pressure	26 bar
Connection	DIN flange DN65
Weight	85 kg
Variant	2
Data basis	Published performance curve (Performance table, printed pp. 45–46)

Performance curve

Head versus flow - CDLK32-20/2-2, 60 Hz

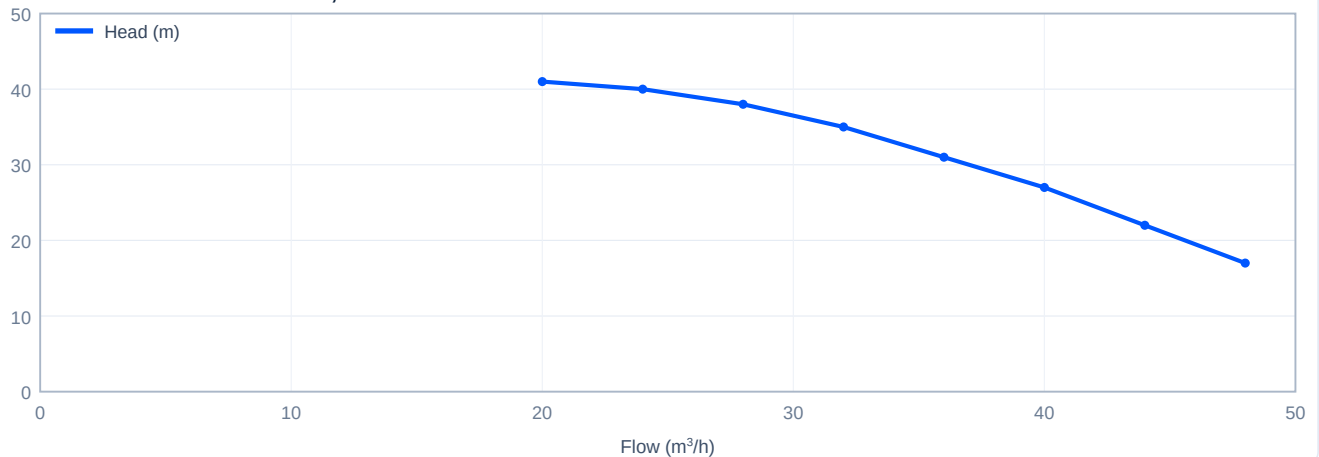

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
20	41
24	40
28	38



Flow (m³/h)	Head (m)
32	35
36	31
40	27
44	22
48	17

Dimensions (mm)

Code	Description	Value
A	A — overall height	818
B	B — immersion length	263
C	C — motor height	555
D	D	210
D1	D1 — motor diameter	260
-	Net weight	85

Dimension codes follow the CNP catalogue drawing. Confirm installation dimensions with the approved drawing before civil or piping work.

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261029-4EAA2. Contact: +92 345 9547419 sales@cnppakistan.com