

CDLK32-60/6

CDLK / CDLKF (immersion) | Vertical multistage centrifugal pump



CNP-M-001073

Scan to open this online



FLOW RANGE

20 - 48 m³/h

HEAD RANGE

81 - 155 m

MOTOR

18.5 kW

SPEED


3500 rpm

Specifications

Series	CDLK / CDLKF (immersion)
Size	CDLK32
Stages	6
Mains frequency	60 Hz
Speed	3500 rpm
Motor power	18.5 kW (25 hp)
Max pressure	26 bar
Connection	DIN flange DN65
Weight	225 kg
Data basis	Published performance curve (Performance table, printed pp. 45–46)

Performance curve

Head versus flow - CDLK32-60/6, 60 Hz

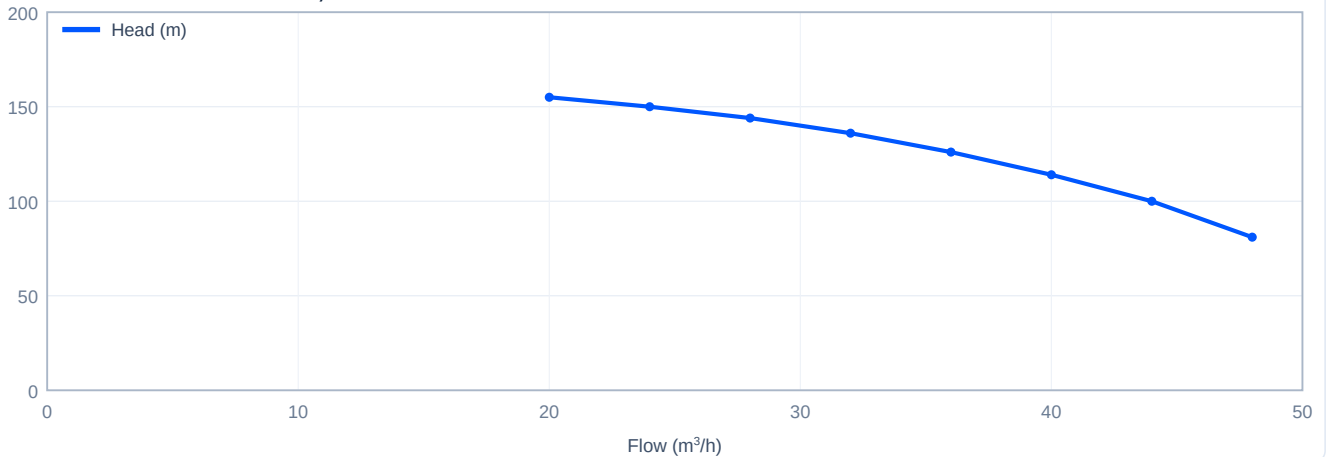

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
20	155
24	150
28	144
32	136



Flow (m³/h)	Head (m)
36	126
40	114
44	100
48	81

Dimensions (mm)

Code	Description	Value
A	A — overall height	1311
B	B — immersion length	543
C	C — motor height	768
D	D	255
D1	D1 — motor diameter	330
-	Net weight	225

Dimension codes follow the CNP catalogue drawing. Confirm installation dimensions with the approved drawing before civil or piping work.

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261028-FE589. Contact: +92 345 9547419 sales@cnppakistan.com