

CDLK4-20/2

CDLK / CDLKF (immersion) | Vertical multistage centrifugal pump



CNP-M-001430

Scan to open this online



FLOW RANGE

2.5 - 8 m³/h

HEAD RANGE

14 - 26 m

MOTOR

0.75 kW

SPEED


3500 rpm

Specifications

Series	CDLK / CDLKF (immersion)
Size	CDLK4
Stages	2
Mains frequency	60 Hz
Speed	3500 rpm
Motor power	0.75 kW (1 hp)
Max pressure	21 bar
Connection	Thread G1 1/4"
Weight	15 kg
Data basis	Published performance curve (Performance table, printed pp. 37–38)

Performance curve

Head versus flow - CDLK4-20/2, 60 Hz

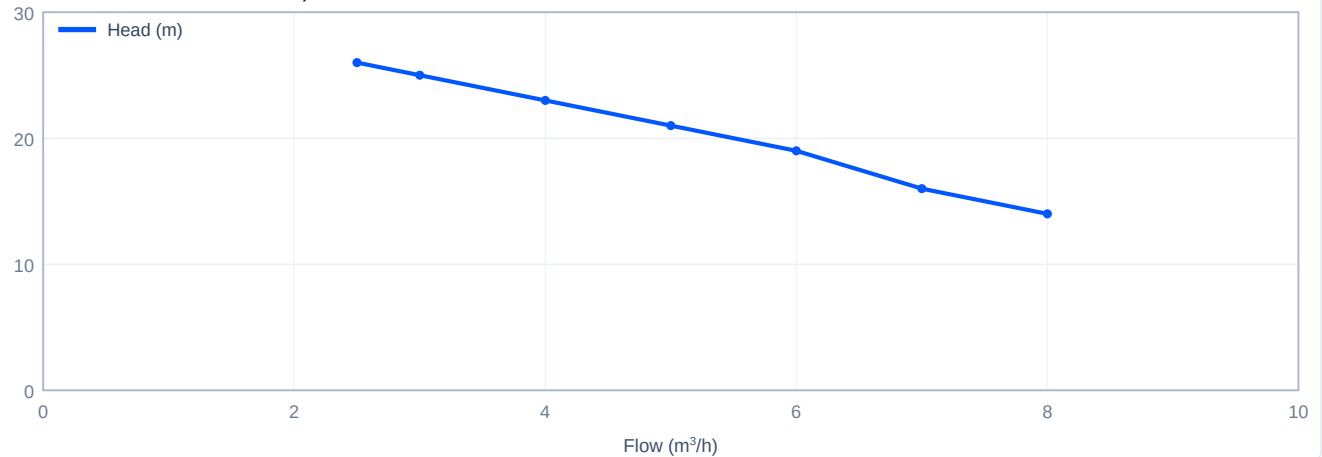

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
2.5	26
3	25
4	23
5	21



Flow (m³/h)	Head (m)
6	19
7	16
8	14

Dimensions (mm)

Code	Description	Value
A	A — overall height	508
B	B — immersion length	150
C	C — motor height	358
D	D	142
D1	D1 — motor diameter	170
-	Net weight	15

Dimension codes follow the CNP catalogue drawing. Confirm installation dimensions with the approved drawing before civil or piping work.

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261029-0A3CF. Contact: +92 345 9547419 sales@cnppakistan.com