

CDLK4-30/3

CDLK / CDLKF (immersion) | Vertical multistage centrifugal pump



CNP-M-001023

Scan to open this online



FLOW RANGE

2.5 - 8 m³/h

HEAD RANGE

21 - 39 m

MOTOR

1.1 kW

SPEED


3500 rpm

Specifications

Series	CDLK / CDLKF (immersion)
Size	CDLK4
Stages	3
Mains frequency	60 Hz
Speed	3500 rpm
Motor power	1.1 kW (1.5 hp)
Max pressure	21 bar
Connection	Thread G1 1/4"
Weight	18 kg
Data basis	Published performance curve (Performance table, printed pp. 37–38)

Performance curve

Head versus flow - CDLK4-30/3, 60 Hz

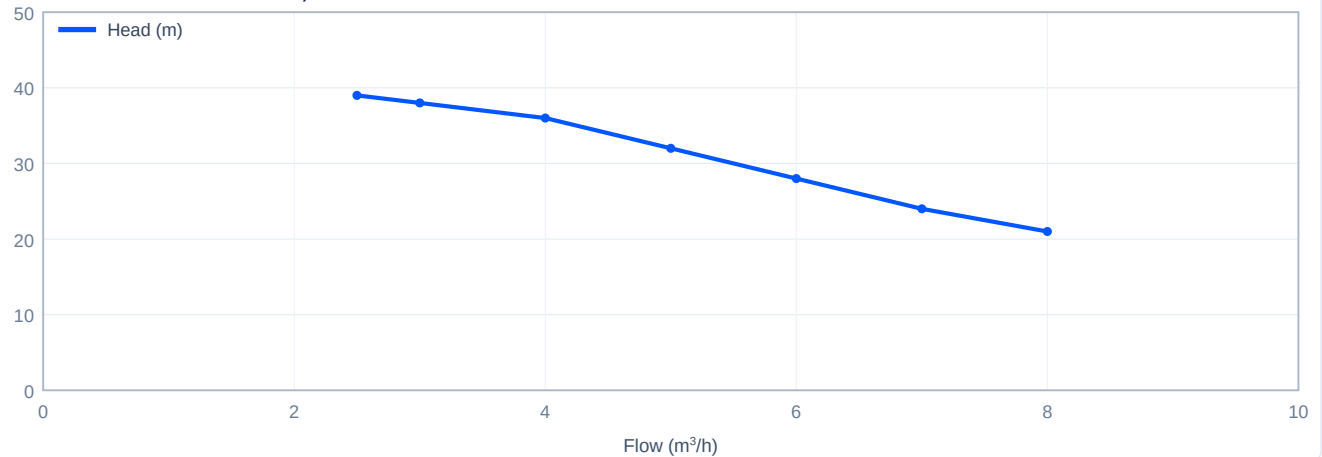

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
2.5	39
3	38
4	36
5	32



Flow (m³/h)	Head (m)
6	28
7	24
8	21

Dimensions (mm)

Code	Description	Value
A	A — overall height	535
B	B — immersion length	177
C	C — motor height	358
D	D	142
D1	D1 — motor diameter	170
-	Net weight	18

Dimension codes follow the CNP catalogue drawing. Confirm installation dimensions with the approved drawing before civil or piping work.

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261028-96EF8. Contact: +92 345 9547419 sales@cnppakistan.com