CNP PUMPS PAKISTAN

CDLK4-60/6

CDLK / CDLKF (immersion) | Vertical multistage centrifugal pump

CNP-M-001711

Scan to open this online

FLOW RANGE	HEAD RANGE	MOTOR	SPEED
2.5 - 8 m³/h	**47 - 78 m**	**2.2 kW**	**3500 rpm**

Specifications

Series	**CDLK / CDLKF (immersion)**
Size	**CDLK4**
Stages	**6**
Mains frequency	**60 Hz**
Speed	**3500 rpm**
Motor power	**2.2 kW (3 hp)**
Max pressure	**21 bar**
Connection	**Thread G1 1/4"**
Weight	**27 kg**
Data basis	**Published performance curve (Performance table, printed pp. 37–38)**

Performance curve

Head versus flow - CDLK4-60/6, 60 Hz

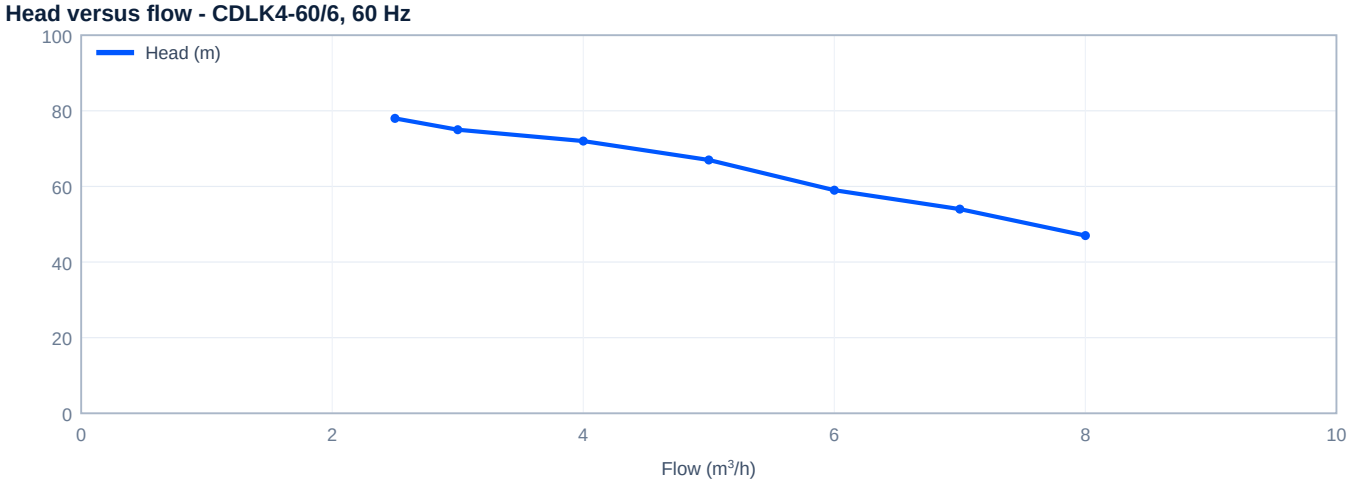

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m³/h)	Head (m)
2.5	78
3	75
4	72
5	67

Flow (m^3/h)	Head (m)
6	59
7	54
8	47

Dimensions (mm)

Code	Description	Value
A	A — overall height	671
B	B — immersion length	258
C	C — motor height	413
D	D	155
D1	D1 — motor diameter	190
-	Net weight	27

Dimension codes follow the CNP catalogue drawing. Confirm installation dimensions with the approved drawing before civil or piping work.

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261029-EB828. Contact: +92 345 9547419 sales@cnppakistan.com