

CDLK8-50/5

CDLK / CDLKF (immersion) | Vertical multistage centrifugal pump



CNP-M-001759

Scan to open this online



FLOW RANGE

7 - 14 m³/h

HEAD RANGE

47 - 70 m

MOTOR

3 kW

SPEED


3500 rpm

Specifications

Series	CDLK / CDLKF (immersion)
Size	CDLK8
Stages	5
Mains frequency	60 Hz
Speed	3500 rpm
Motor power	3 kW (4 hp)
Max pressure	21 bar
Connection	Thread G2"
Weight	47 kg
Data basis	Published performance curve (Performance table, printed pp. 39–40)

Performance curve

Head versus flow - CDLK8-50/5, 60 Hz

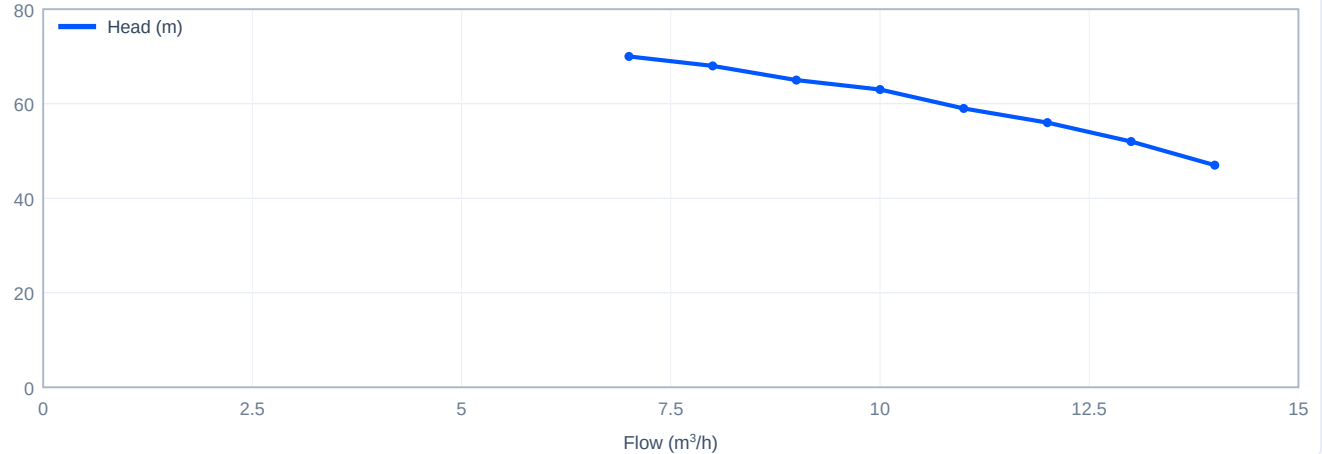

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
7	70
8	68
9	65
10	63



Flow (m³/h)	Head (m)
11	59
12	56
13	52
14	47

Dimensions (mm)

Code	Description	Value
A	A — overall height	715
B	B — immersion length	231
C	C — motor height	484
D	D	165
D1	D1 — motor diameter	197
-	Net weight	47

Dimension codes follow the CNP catalogue drawing. Confirm installation dimensions with the approved drawing before civil or piping work.

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261029-6848D. Contact: +92 345 9547419 sales@cnppakistan.com