

CDM15-3

CDM / CDMF | Vertical multistage centrifugal pump



CNP-M-000513

Scan to open this online



FLOW RANGE

8 - 24 m³/h

HEAD RANGE

21 - 40 m

MOTOR

3 kW

SPEED


2900 rpm

Specifications

Series	CDM / CDMF
Size	CDM15
Stages	3
Mains frequency	50 Hz
Speed	2900 rpm
Motor power	3 kW (4 hp)
Max pressure	22 bar
Connection	DIN flange DN50
Weight	59 kg
Data basis	Published performance curve (Performance table printed p. 19; dimensions p. 40)

Performance curve

Head versus flow - CDM15-3, 50 Hz

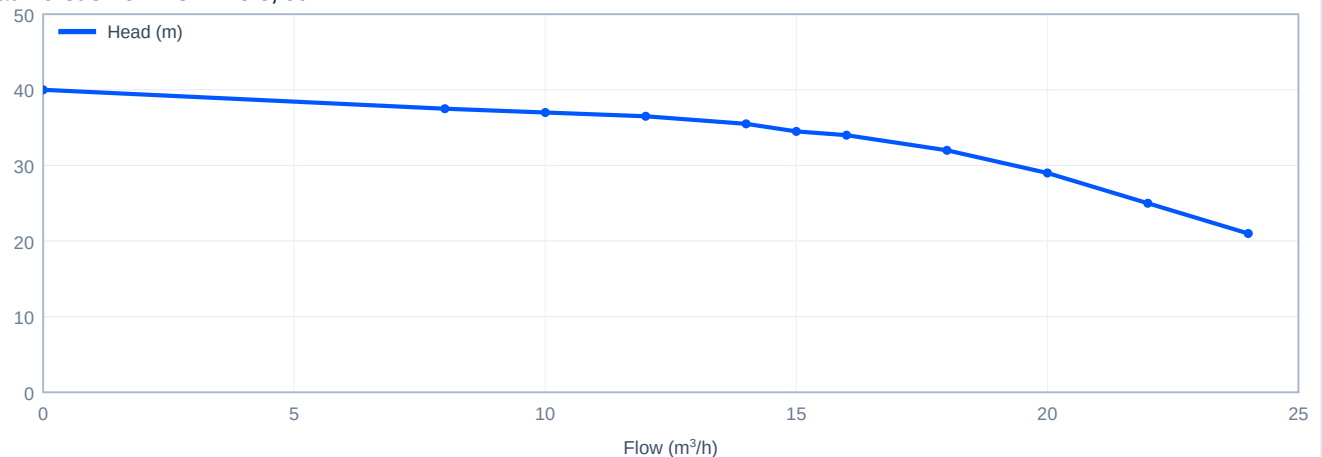

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
0	40
8	37.5
10	37
12	36.5



Flow (m³/h)	Head (m)
14	35.5
15	34.5
16	34
18	32
20	29
22	25
24	21

Dimensions (mm)

Code	Description	Value
H1	H1 — pump height	362
H2	H2 — motor height	345
H	H — overall height, flange	797
D1	D1 — motor diameter	197
D2	D2 — base / flange width	132
weight_cdmf_kg	Net weight CDMF	52
-	Net weight	59

Dimension codes follow the CNP catalogue drawing. Confirm installation dimensions with the approved drawing before civil or piping work.

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261027-45BB7. Contact: +92 345 9547419 sales@cnppakistan.com