

CDM15-4

CDM / CDMF | Vertical multistage centrifugal pump



CNP-M-000365

Scan to open this online



FLOW RANGE

8 - 24 m³/h

HEAD RANGE

28.5 - 54 m

MOTOR

4 kW

SPEED


2900 rpm

Specifications

Series	CDM / CDMF
Size	CDM15
Stages	4
Mains frequency	50 Hz
Speed	2900 rpm
Motor power	4 kW (5.5 hp)
Max pressure	22 bar
Connection	DIN flange DN50
Weight	66 kg
Data basis	Published performance curve (Performance table printed p. 19; dimensions p. 40)

Performance curve

Head versus flow - CDM15-4, 50 Hz

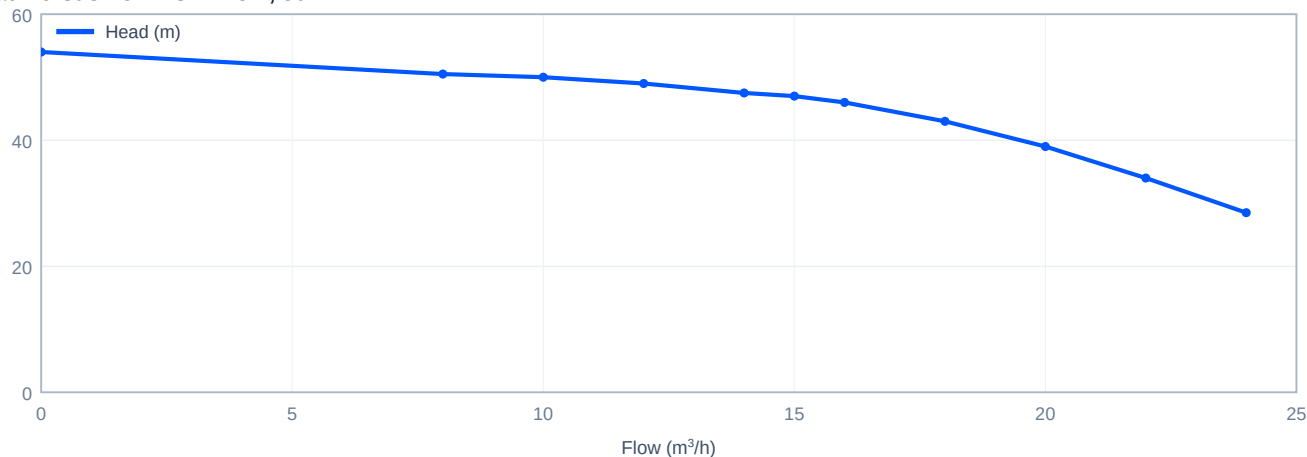

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
0	54
8	50.5
10	50
12	49



Flow (m³/h)	Head (m)
14	47.5
15	47
16	46
18	43
20	39
22	34
24	28.5

Dimensions (mm)

Code	Description	Value
H1	H1 — pump height	407
H2	H2 — motor height	348
H	H — overall height, flange	845
D1	D1 — motor diameter	215
D2	D2 — base / flange width	151
weight_cdmf_kg	Net weight CDMF	59
-	Net weight	66

Dimension codes follow the CNP catalogue drawing. Confirm installation dimensions with the approved drawing before civil or piping work.

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261028-77CA9. Contact: +92 345 9547419 sales@cnppakistan.com