

CDM32-1-1

CDM / CDMF | Vertical multistage centrifugal pump



CNP-M-000521

Scan to open this online



FLOW RANGE

16 - 40 m³/h

HEAD RANGE

4 - 15 m

MOTOR

1.5 kW

SPEED


2900 rpm

Specifications

Series	CDM / CDMF
Size	CDM32
Stages	1
Mains frequency	50 Hz
Speed	2900 rpm
Motor power	1.5 kW (2 hp)
Max pressure	29 bar
Connection	DIN flange DN65
Weight	66 kg
Variant	1
Data basis	Published performance curve (Performance table printed p. 23; dimensions p. 42)

Performance curve

Head versus flow - CDM32-1-1, 50 Hz

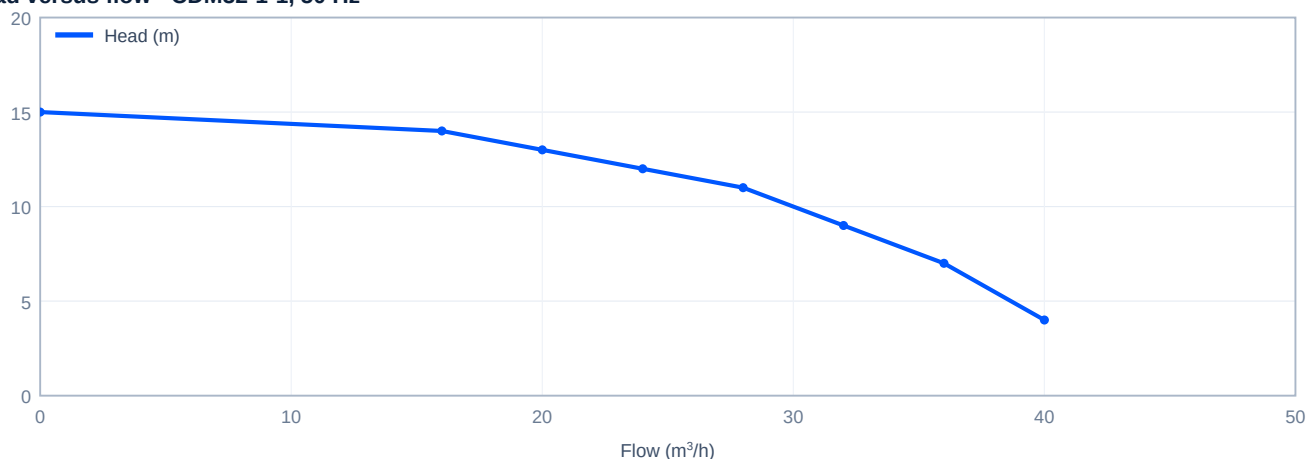

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
0	15
16	14
20	13



Flow (m³/h)	Head (m)
24	12
28	11
32	9
36	7
40	4

Dimensions (mm)

Code	Description	Value
H1	H1 — pump height	329
H2	H2 — motor height	293
H	H — overall height, flange	727
D1	D1 — motor diameter	172
D2	D2 — base / flange width	120
weight_cdmf_kg	Net weight CDMF	54
-	Net weight	66

Dimension codes follow the CNP catalogue drawing. Confirm installation dimensions with the approved drawing before civil or piping work.

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261027-E4C02. Contact: +92 345 9547419 sales@cnppakistan.com