

CDM32-13

CDM / CDMF | Vertical multistage centrifugal pump



CNP-M-000650

Scan to open this online



FLOW RANGE

16 - 40 m³/h

HEAD RANGE

131 - 253 m

MOTOR

30 kW

SPEED


2900 rpm

Specifications

Series	CDM / CDMF
Size	CDM32
Stages	13
Mains frequency	50 Hz
Speed	2900 rpm
Motor power	30 kW (40 hp)
Max pressure	29 bar
Connection	DIN flange DN65
Weight	343 kg
Data basis	Published performance curve (Performance table printed p. 23; dimensions p. 42)

Performance curve

Head versus flow - CDM32-13, 50 Hz

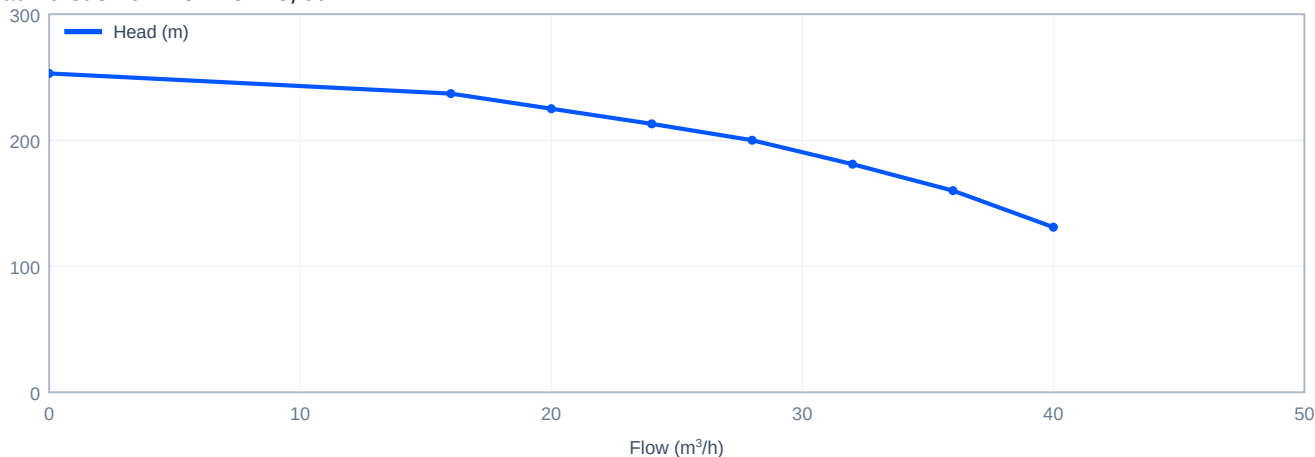

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
0	253
16	237
20	225
24	213



Flow (m³/h)	Head (m)
28	200
32	181
36	160
40	131

Dimensions (mm)

Code	Description	Value
H1	H1 — pump height	1290
H2	H2 — motor height	650
H	H — overall height, flange	2045
D1	D1 — motor diameter	418
D2	D2 — base / flange width	256
weight_cdmf_kg	Net weight CDMF	339
-	Net weight	343

Dimension codes follow the CNP catalogue drawing. Confirm installation dimensions with the approved drawing before civil or piping work.

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261028-81528. Contact: +92 345 9547419 sales@cnppakistan.com