

CDM32-14

CDM / CDMF | Vertical multistage centrifugal pump



CNP-M-000124

Scan to open this online



FLOW RANGE

16 - 40 m³/h

HEAD RANGE

142 - 273 m

MOTOR

30 kW


SPEED

2900 rpm

Specifications

Series	CDM / CDMF
Size	CDM32
Stages	14
Mains frequency	50 Hz
Speed	2900 rpm
Motor power	30 kW (40 hp)
Max pressure	29 bar
Connection	DIN flange DN65
Weight	346 kg
Data basis	Published performance curve (Performance table printed p. 23; dimensions p. 42)

Performance curve

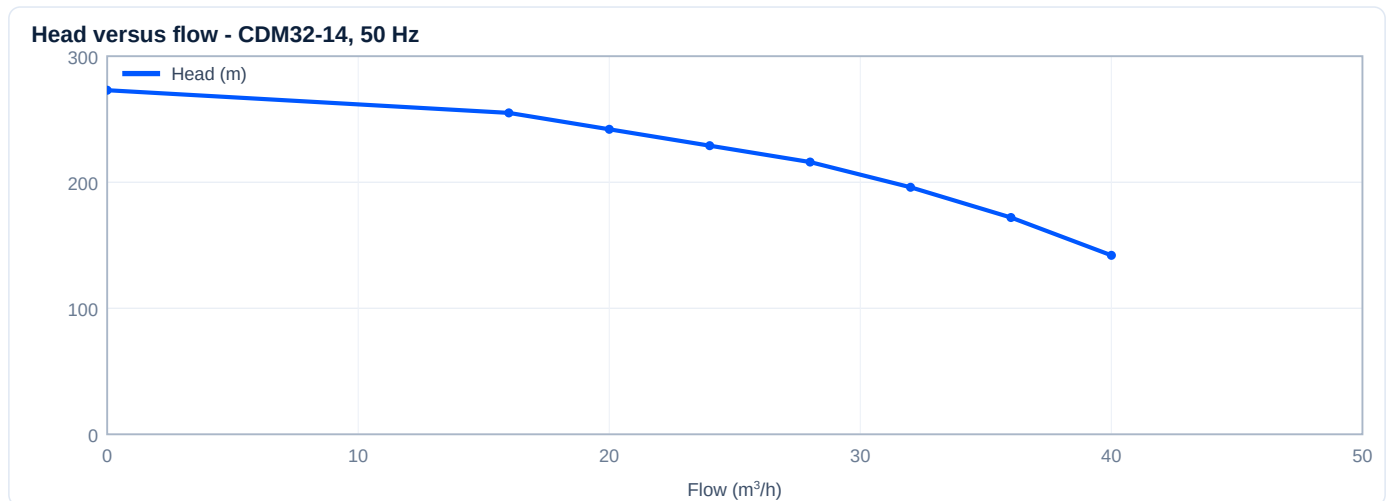

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
0	273
16	255
20	242
24	229



Flow (m³/h)	Head (m)
28	216
32	196
36	172
40	142

Dimensions (mm)

Code	Description	Value
H1	H1 — pump height	1360
H2	H2 — motor height	650
H	H — overall height, flange	2115
D1	D1 — motor diameter	418
D2	D2 — base / flange width	256
weight_cdmf_kg	Net weight CDMF	342
-	Net weight	346

Dimension codes follow the CNP catalogue drawing. Confirm installation dimensions with the approved drawing before civil or piping work.

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261027-861A1. Contact: +92 345 9547419 sales@cnppakistan.com