

CDM32-9-2

CDM / CDMF | Vertical multistage centrifugal pump



CNP-M-001385

Scan to open this online



FLOW RANGE

16 - 40 m³/h

HEAD RANGE

80 - 163 m

MOTOR

18.5 kW

SPEED


2900 rpm

Specifications

Series	CDM / CDMF
Size	CDM32
Stages	9
Mains frequency	50 Hz
Speed	2900 rpm
Motor power	18.5 kW (25 hp)
Max pressure	29 bar
Connection	DIN flange DN65
Weight	218 kg
Variant	2
Data basis	Published performance curve (Performance table printed p. 23; dimensions p. 42)

Performance curve

Head versus flow - CDM32-9-2, 50 Hz

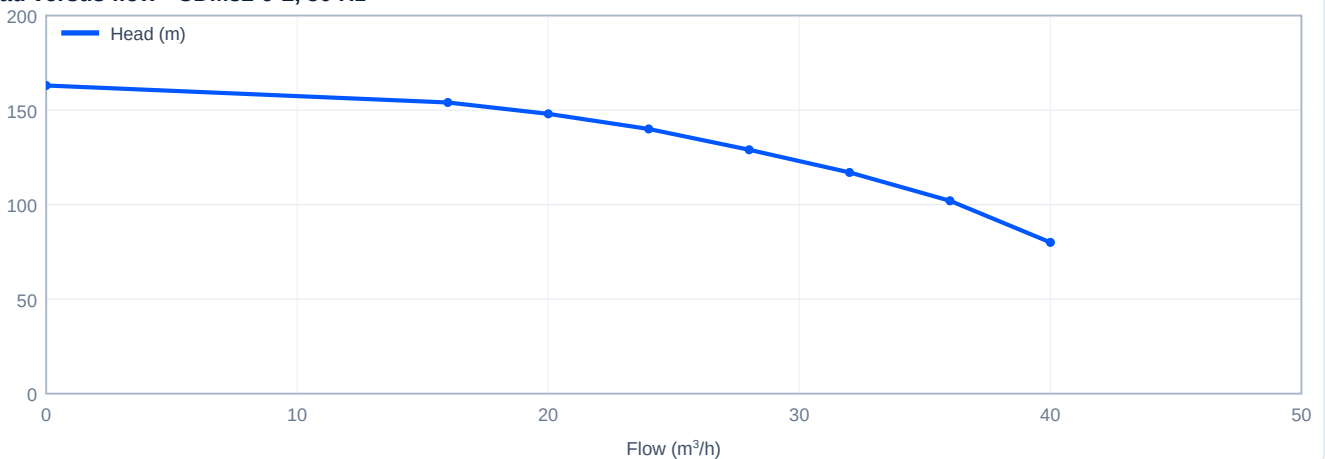

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
0	163
16	154
20	148



Flow (m³/h)	Head (m)
24	140
28	129
32	117
36	102
40	80

Dimensions (mm)

Code	Description	Value
H1	H1 — pump height	1010
H2	H2 — motor height	545
H	H — overall height, flange	1660
D1	D1 — motor diameter	330
D2	D2 — base / flange width	205
weight_cdmf_kg	Net weight CDMF	214
-	Net weight	218

Dimension codes follow the CNP catalogue drawing. Confirm installation dimensions with the approved drawing before civil or piping work.

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261029-7BE07. Contact: +92 345 9547419 sales@cnppakistan.com