

CDM65-2-2

CDM / CDMF | Vertical multistage centrifugal pump



CNP-M-000469

Scan to open this online



FLOW RANGE

30 - 80 m³/h

HEAD RANGE

17 - 42 m

MOTOR

7.5 kW

SPEED


2900 rpm

Specifications

Series	CDM / CDMF
Size	CDM65
Stages	2
Mains frequency	50 Hz
Speed	2900 rpm
Motor power	7.5 kW (10 hp)
Max pressure	22 bar
Connection	DIN flange DN100
Weight	133 kg
Variant	2
Data basis	Published performance curve (Performance table printed p. 27; dimensions p. 44)

Performance curve

Head versus flow - CDM65-2-2, 50 Hz

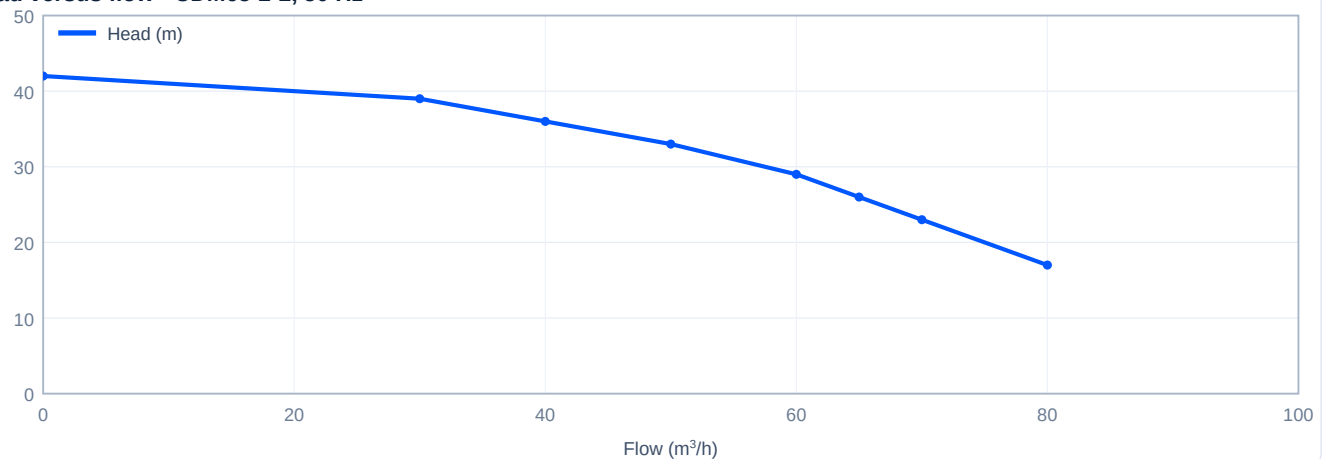

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
0	42
30	39
40	36



Flow (m³/h)	Head (m)
50	33
60	29
65	26
70	23
80	17

Dimensions (mm)

Code	Description	Value
H1	H1 — pump height	527
H2	H2 — motor height	390
H	H — overall height, flange	1057
D1	D1 — motor diameter	260
D2	D2 — base / flange width	168
weight_cdmf_kg	Net weight CDMF	102
-	Net weight	133

Dimension codes follow the CNP catalogue drawing. Confirm installation dimensions with the approved drawing before civil or piping work.

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261027-252B3. Contact: +92 345 9547419 sales@cnppakistan.com