

CDM65-4

CDM / CDMF | Vertical multistage centrifugal pump



CNP-M-000121

Scan to open this online



FLOW RANGE

30 - 80 m³/h

HEAD RANGE

61 - 116 m

MOTOR

22 kW

SPEED


2900 rpm

Specifications

Series	CDM / CDMF
Size	CDM65
Stages	4
Mains frequency	50 Hz
Speed	2900 rpm
Motor power	22 kW (30 hp)
Max pressure	22 bar
Connection	DIN flange DN100
Weight	284 kg
Data basis	Published performance curve (Performance table printed p. 27; dimensions p. 44)

Performance curve

Head versus flow - CDM65-4, 50 Hz

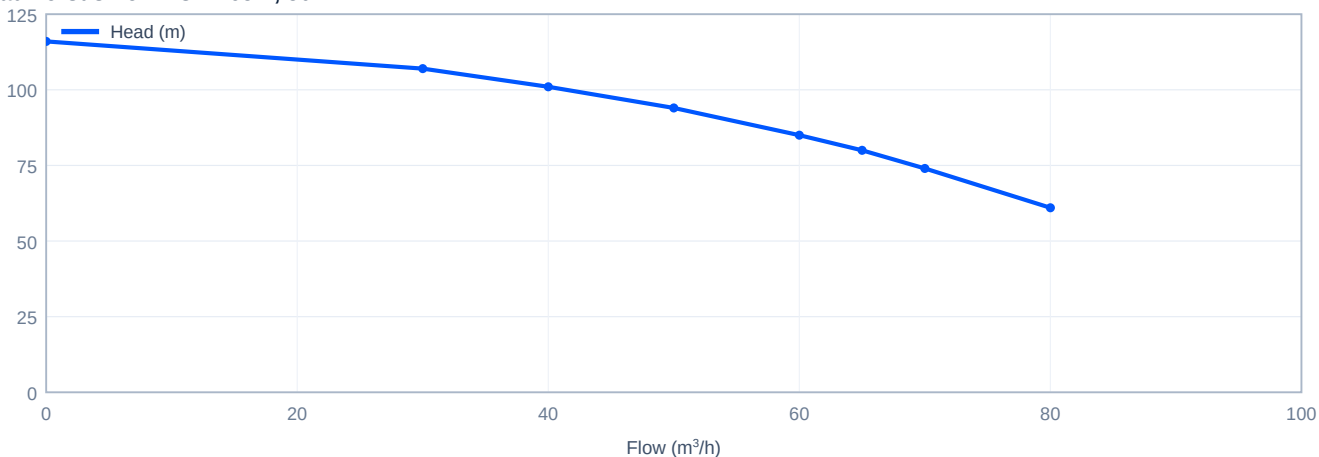

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
0	116
30	107
40	101
50	94



Flow (m³/h)	Head (m)
60	85
65	80
70	74
80	61

Dimensions (mm)

Code	Description	Value
H1	H1 — pump height	723
H2	H2 — motor height	650
H	H — overall height, flange	1513
D1	D1 — motor diameter	418
D2	D2 — base / flange width	256
weight_cdmf_kg	Net weight CDMF	253
-	Net weight	284

Dimension codes follow the CNP catalogue drawing. Confirm installation dimensions with the approved drawing before civil or piping work.

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261027-10B58. Contact: +92 345 9547419 sales@cnppakistan.com