

CDM85-4-2

CDM / CDMF | Vertical multistage centrifugal pump



CNP-M-000829

Scan to open this online



FLOW RANGE

50 - 110 m³/h

HEAD RANGE

50 - 115 m

MOTOR

30 kW

SPEED


2900 rpm

Specifications

Series	CDM / CDMF
Size	CDM85
Stages	4
Mains frequency	50 Hz
Speed	2900 rpm
Motor power	30 kW (40 hp)
Max pressure	17 bar
Connection	DIN flange DN100
Weight	335 kg
Variant	2
Data basis	Published performance curve (Performance table printed p. 29; dimensions p. 45)

Performance curve

Head versus flow - CDM85-4-2, 50 Hz

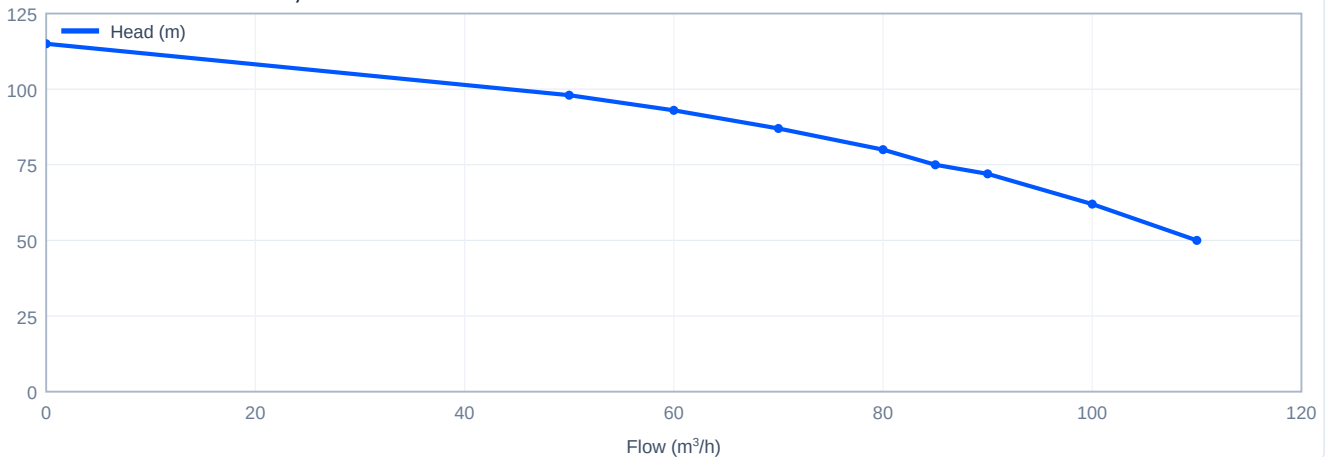

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
0	115
50	98
60	93



Flow (m³/h)	Head (m)
70	87
80	80
85	75
90	72
100	62
110	50

Dimensions (mm)

Code	Description	Value
H1	H1 — pump height	759
H2	H2 — motor height	650
H	H — overall height, flange	1549
D1	D1 — motor diameter	418
D2	D2 — base / flange width	256
weight_cdmf_kg	Net weight CDMF	326
-	Net weight	335

Dimension codes follow the CNP catalogue drawing. Confirm installation dimensions with the approved drawing before civil or piping work.

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261028-0A213. Contact: +92 345 9547419 sales@cnppakistan.com