

CDM15-10

CDM / CDMF | Vertical multistage centrifugal pump



CNP-M-000978

Scan to open this online



FLOW RANGE

10 - 29 m³/h

HEAD RANGE

108 - 203 m

MOTOR

15 kW

SPEED


3500 rpm

Specifications

Series	CDM / CDMF
Size	CDM15
Stages	10
Mains frequency	60 Hz
Speed	3500 rpm
Motor power	15 kW (20 hp)
Max pressure	22 bar
Connection	DIN flange DN50
Weight	181 kg
Data basis	Published performance curve (Performance table printed p. 19; dimensions p. 40)

Performance curve

Head versus flow - CDM15-10, 60 Hz

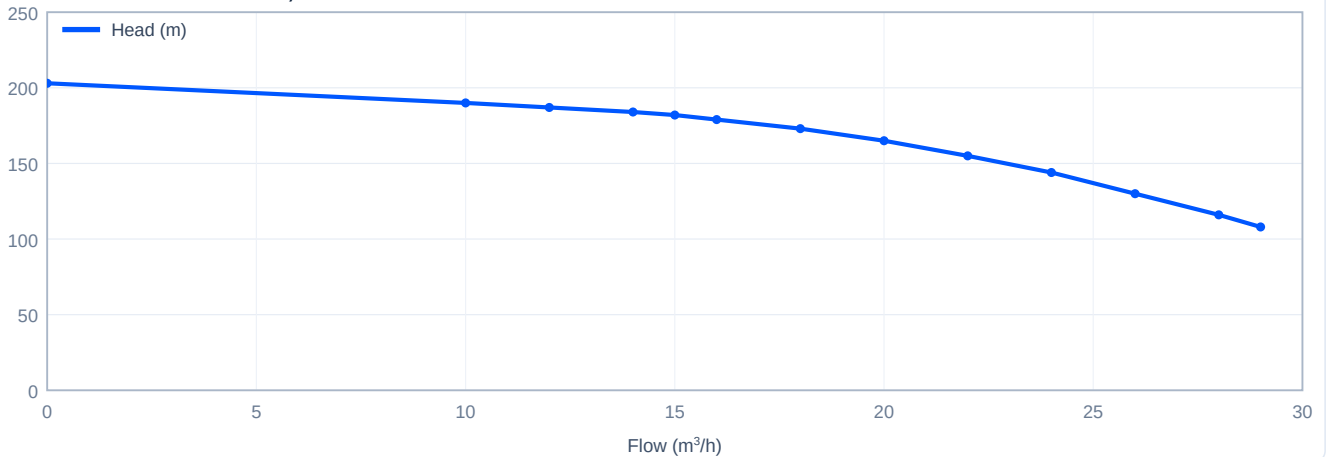

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
0	203
10	190
12	187
14	184



Flow (m³/h)	Head (m)
15	182
16	179
18	173
20	165
22	155
24	144
26	130
28	116
29	108

Dimensions (mm)

Code	Description	Value
H1	H1 — pump height	785
H2	H2 — motor height	500
H	H — overall height, flange	1375
D1	D1 — motor diameter	330
D2	D2 — base / flange width	205
weight_cdmf_kg	Net weight CDMF	174
-	Net weight	181

Dimension codes follow the CNP catalogue drawing. Confirm installation dimensions with the approved drawing before civil or piping work.

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261028-E87E6. Contact: +92 345 9547419 sales@cnppakistan.com