

CDM200-3-A-B

CDM / CDMF | Vertical multistage centrifugal pump



CNP-M-000662

Scan to open this online



FLOW RANGE

100 - 240 m³/h

HEAD RANGE

113.5 - 145 m

MOTOR

110 kW

SPEED


3540 rpm

Specifications

Series	CDM / CDMF
Size	CDM200
Stages	3
Mains frequency	60 Hz
Speed	3540 rpm
Motor power	110 kW (150 hp)
Max pressure	16 bar
Connection	DIN flange DN150
Weight	855 kg
Variant	A-B
Data basis	Published performance curve (Performance table printed p. 35; dimensions p. 48)

Performance curve

Head versus flow - CDM200-3-A-B, 60 Hz

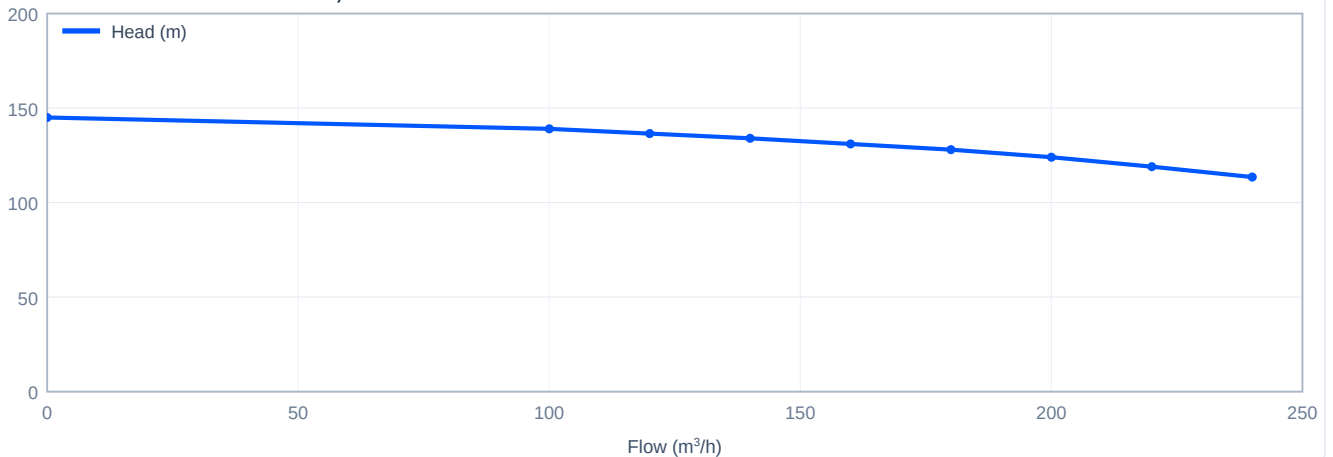

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
0	145
100	139
120	136.5



Flow (m³/h)	Head (m)
140	134
160	131
180	128
200	124
220	119
240	113.5

Dimensions (mm)

Code	Description	Value
H1	H1 — pump height	1170
H2	H2 — motor height	1040
H	H — overall height, flange	2410
D1	D1 — motor diameter	655
D2	D2 — base / flange width	400
weight_cdmf_kg	Net weight CDMF	830
-	Net weight	855

Dimension codes follow the CNP catalogue drawing. Confirm installation dimensions with the approved drawing before civil or piping work.

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261028-8E12D. Contact: +92 345 9547419 sales@cnppakistan.com