

CH250-200-315/75

CH (seawater lift) | Horizontal seawater lift pump



CNP-M-000821

Scan to open this online



FLOW RANGE

300 - 720 m³/h

HEAD RANGE

31.5 - 39.5 m

MOTOR

75 kW

SPEED


2950 rpm

Specifications

Series	CH (seawater lift)
Size	CH250-200-315
Mains frequency	50 Hz
Speed	2950 rpm
Motor power	75 kW
Max pressure	63 bar
Connection	See model dimensions
Weight	894 kg
Data basis	Published performance curve (CH section, printed p. 22)

Performance curve

Head versus flow - CH250-200-315/75, 50 Hz

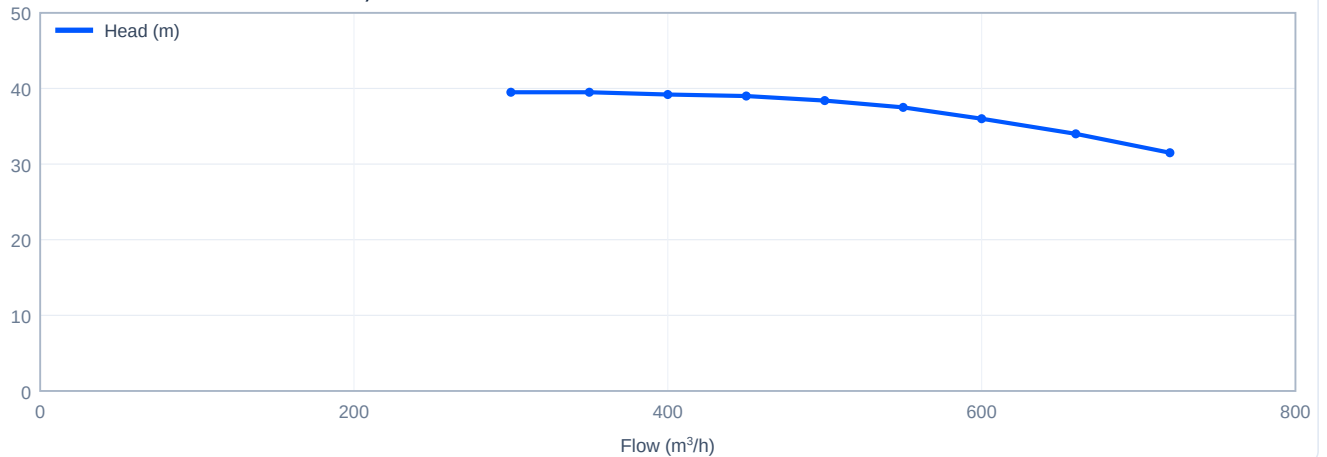

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
300	39.5
350	39.5
400	39.2
450	39
500	38.4



Flow (m³/h)	Head (m)
550	37.5
600	36
660	34
720	31.5

Dimensions (mm)

Code	Description	Value
flange_inlet_dn	Inlet flange DN (Class 600)	250
flange_outlet_dn	Outlet flange DN (Class 600)	200
-	Net weight	894

Dimension codes follow the CNP catalogue drawing. Confirm installation dimensions with the approved drawing before civil or piping work.

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261028-2B722. Contact: +92 345 9547419 sales@cnppakistan.com