

CHL12-30G

CHL / CHLK | Horizontal multistage stainless steel centrifugal pump



CNP-M-000686

Scan to open this online



FLOW RANGE

7 - 16 m³/h

HEAD RANGE

20 - 35 m

MOTOR

1.8 kW

SPEED


2900 rpm

Specifications

Series	CHL / CHLK
Size	CHL12
Stages	3
Mains frequency	50 Hz
Speed	2900 rpm
Motor power	1.8 kW (2.4 hp)
Max pressure	10 bar
Connection	Thread inlet G2, outlet G2
Weight	27 kg
Variant	G
Data basis	Published performance curve (Performance table printed pp. 13–14)

Performance curve

Head versus flow - CHL12-30G, 50 Hz

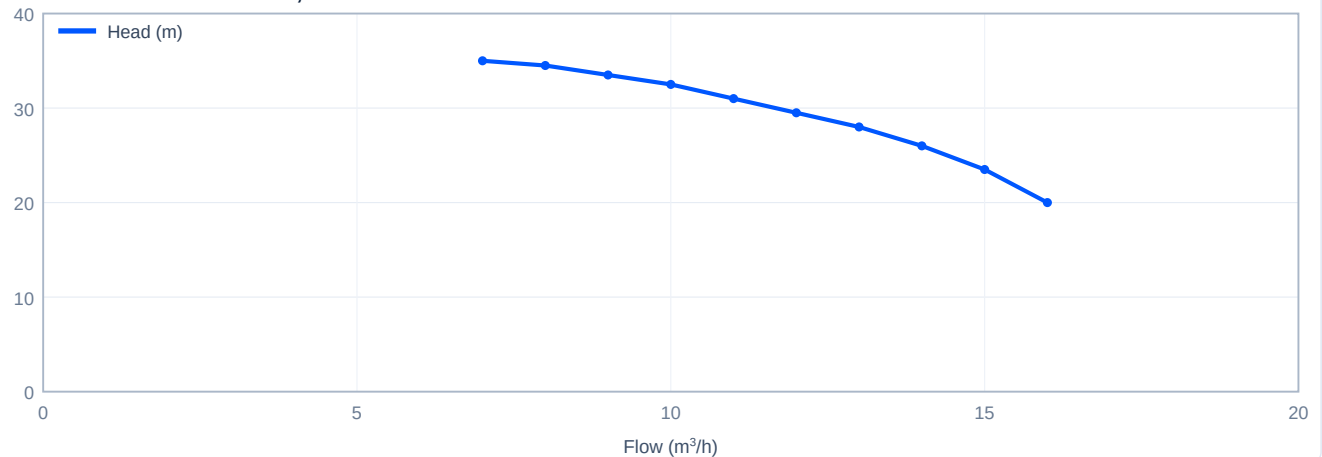

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
7	35
8	34.5
9	33.5



Flow (m³/h)	Head (m)
10	32.5
11	31
12	29.5
13	28
14	26
15	23.5
16	20

Dimensions (mm)

Code	Description	Value
L1	L1 — overall length, three-phase	490
L2	L2	199
L3	L3	95
N	N	118
E	E	250
G	G	193
D	D — motor width, three-phase	171
D_1ph	D — motor width, single-phase	176
H	H — height, three-phase	235
H_1ph	H — height, single-phase	270
K_1ph	K — single-phase only	91
-	Net weight	27

Dimension codes follow the CNP catalogue drawing. Confirm installation dimensions with the approved drawing before civil or piping work.

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261028-934CC. Contact: +92 345 9547419 sales@cnppakistan.com