CNP PUMPS PAKISTAN

CHL2-60

CHL / CHLK | Horizontal multistage stainless steel centrifugal pump

CNP-M-001581

Scan to open this online

FLOW RANGE	HEAD RANGE	MOTOR	SPEED
0.5 - 3.5 m³/h	**24 - 53.5 m**	**0.75 kW**	**2900 rpm**

Specifications

Series	**CHL / CHLK**
Size	**CHL2**
Stages	**6**
Mains frequency	**50 Hz**
Speed	**2900 rpm**
Motor power	**0.75 kW (1 hp)**
Max pressure	**10 bar**
Connection	**Thread inlet G1, outlet G1**
Weight	**14 kg**
Data basis	**Published performance curve (Performance table printed pp. 7–8)**

Performance curve

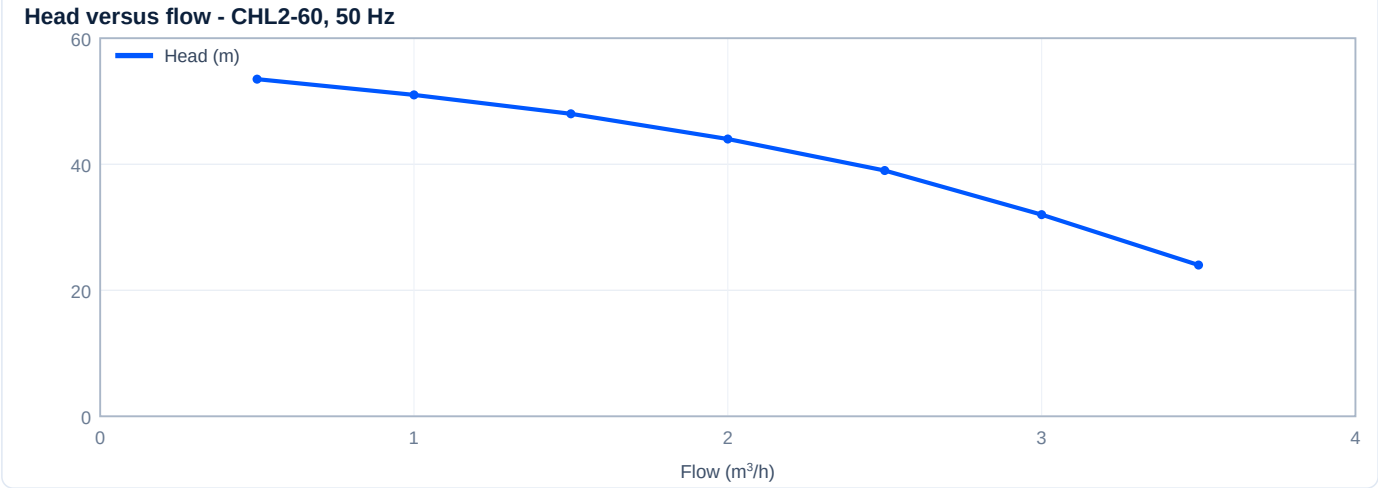

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m³/h)	Head (m)
0.5	53.5
1	51
1.5	48
2	44

Flow (m^3/h)	Head (m)
2.5	39
3	32
3.5	24

Dimensions (mm)

Code	Description	Value
L1	L1 — overall length, three-phase	420
L2	L2	165
L3	L3	125
D	D — motor width, three-phase	151
D_1ph	D — motor width, single-phase	161
H	H — height, three-phase	225
H_1ph	H — height, single-phase	265
K_1ph	K — single-phase only	91
-	Net weight	14

Dimension codes follow the CNP catalogue drawing. Confirm installation dimensions with the approved drawing before civil or piping work.

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261029-34B8C. Contact: +92 345 9547419 sales@cnppakistan.com