

CHL8-10G

CHL / CHLK | Horizontal multistage stainless steel centrifugal pump



CNP-M-001638

Scan to open this online



FLOW RANGE

6 - 13 m³/h

HEAD RANGE

9.5 - 14.5 m

MOTOR

0.75 kW

SPEED


3500 rpm

Specifications

Series	CHL / CHLK
Size	CHL8
Stages	1
Mains frequency	60 Hz
Speed	3500 rpm
Motor power	0.75 kW (1 hp)
Max pressure	10 bar
Connection	Thread inlet G2, outlet G2
Weight	19.5 kg
Variant	G
Data basis	Published performance curve (Performance table printed pp. 35–36)

Performance curve

Head versus flow - CHL8-10G, 60 Hz

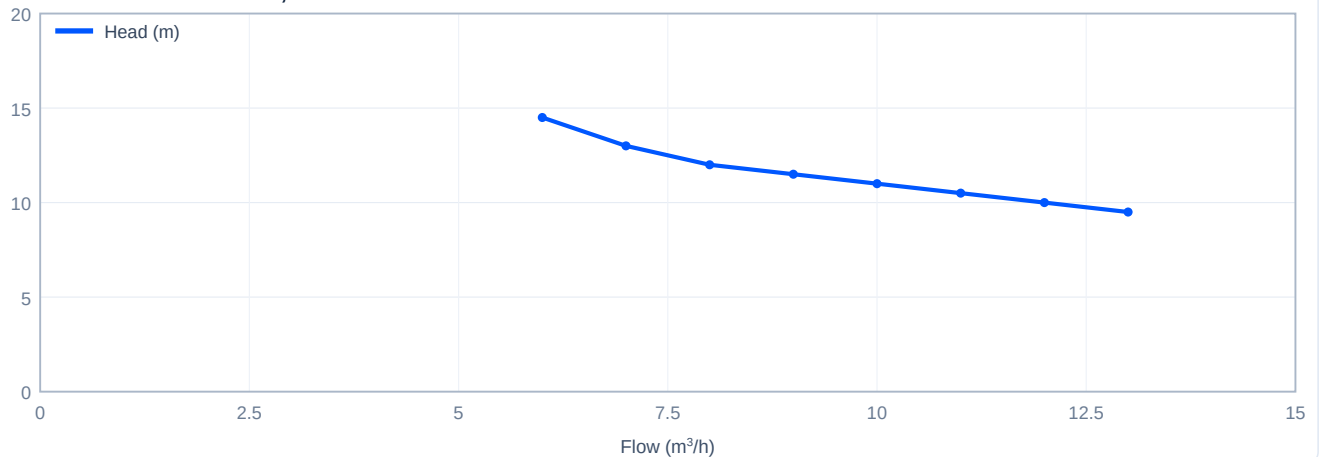

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
6	14.5
7	13
8	12



Flow (m³/h)	Head (m)
9	11.5
10	11
11	10.5
12	10
13	9.5

Dimensions (mm)

Code	Description	Value
L1	L1 — overall length, three-phase	480
L2	L2	199
L3	L3	95
N	N	117
E	E	249
G	G	193
D	D — motor width, three-phase	151
D_1ph	D — motor width, single-phase	161
H	H — height, three-phase	230
H_1ph	H — height, single-phase	265
K_1ph	K — single-phase only	91
-	Net weight	19.5

Dimension codes follow the CNP catalogue drawing. Confirm installation dimensions with the approved drawing before civil or piping work.

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261029-B97EA. Contact: +92 345 9547419 sales@cnppakistan.com